




CARGO FRAMES

Screwable steel subframes SRV180 up to 18 tons

CONTENT

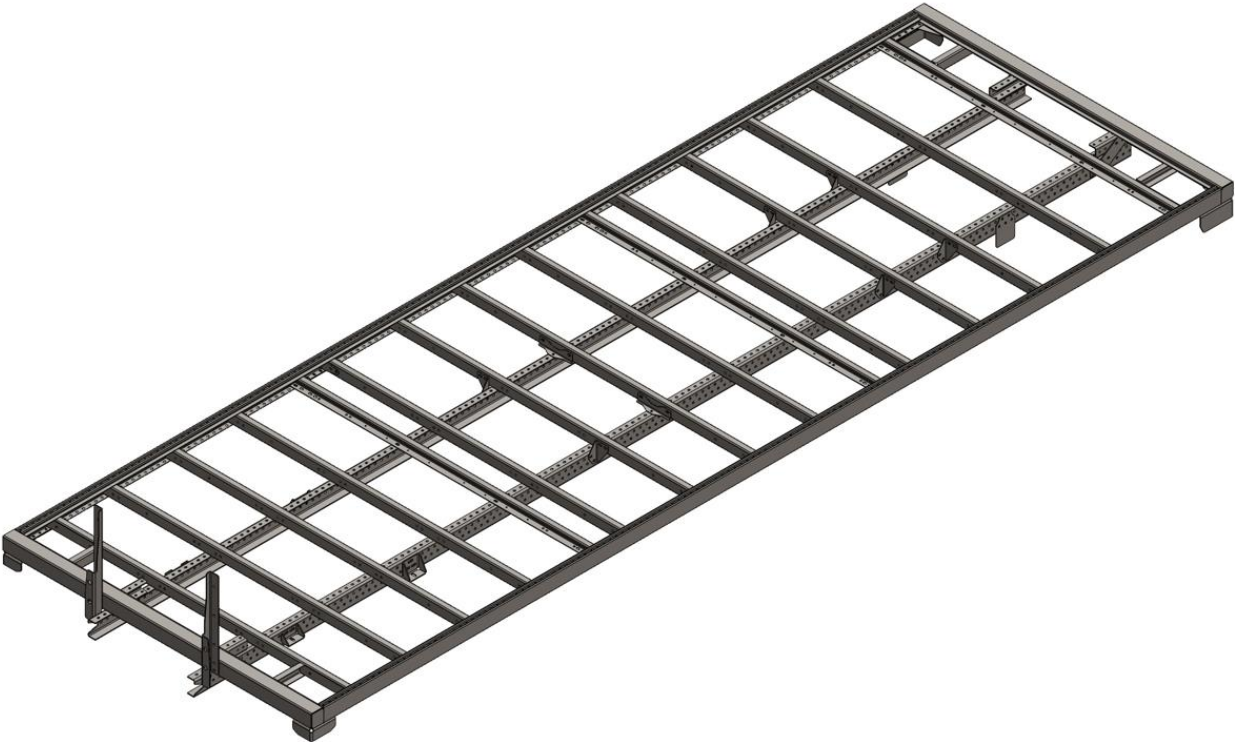


Technical parametrs	3
CF Screw	4
Certificated lashing ring	5
Plastic plug	6
Side rave profiles	7
Crossbeams	8
Longitudinals	9
Front and rear traverse	11
Brackets	13
Accessories	14
Ordering parameters	17
Contact	23

TECHNICAL PARAMETERS

- Side rave profiles 109/21/3 mm, 115/27/3 mm, 140/27/3 mm
- Standard width of the frame 2480 mm.
- Maximal standard lenght of the frame 8600 mm.
- Maximal length of the longitudinals without connection 8400 mm.
- Maximal length of the longitudinals with connection - unlimited
- Standard longitudinals distance 846 - 870 mm.
- Gross weight up to 18 tons

Individual dimensions and technical solution
Are possible on request

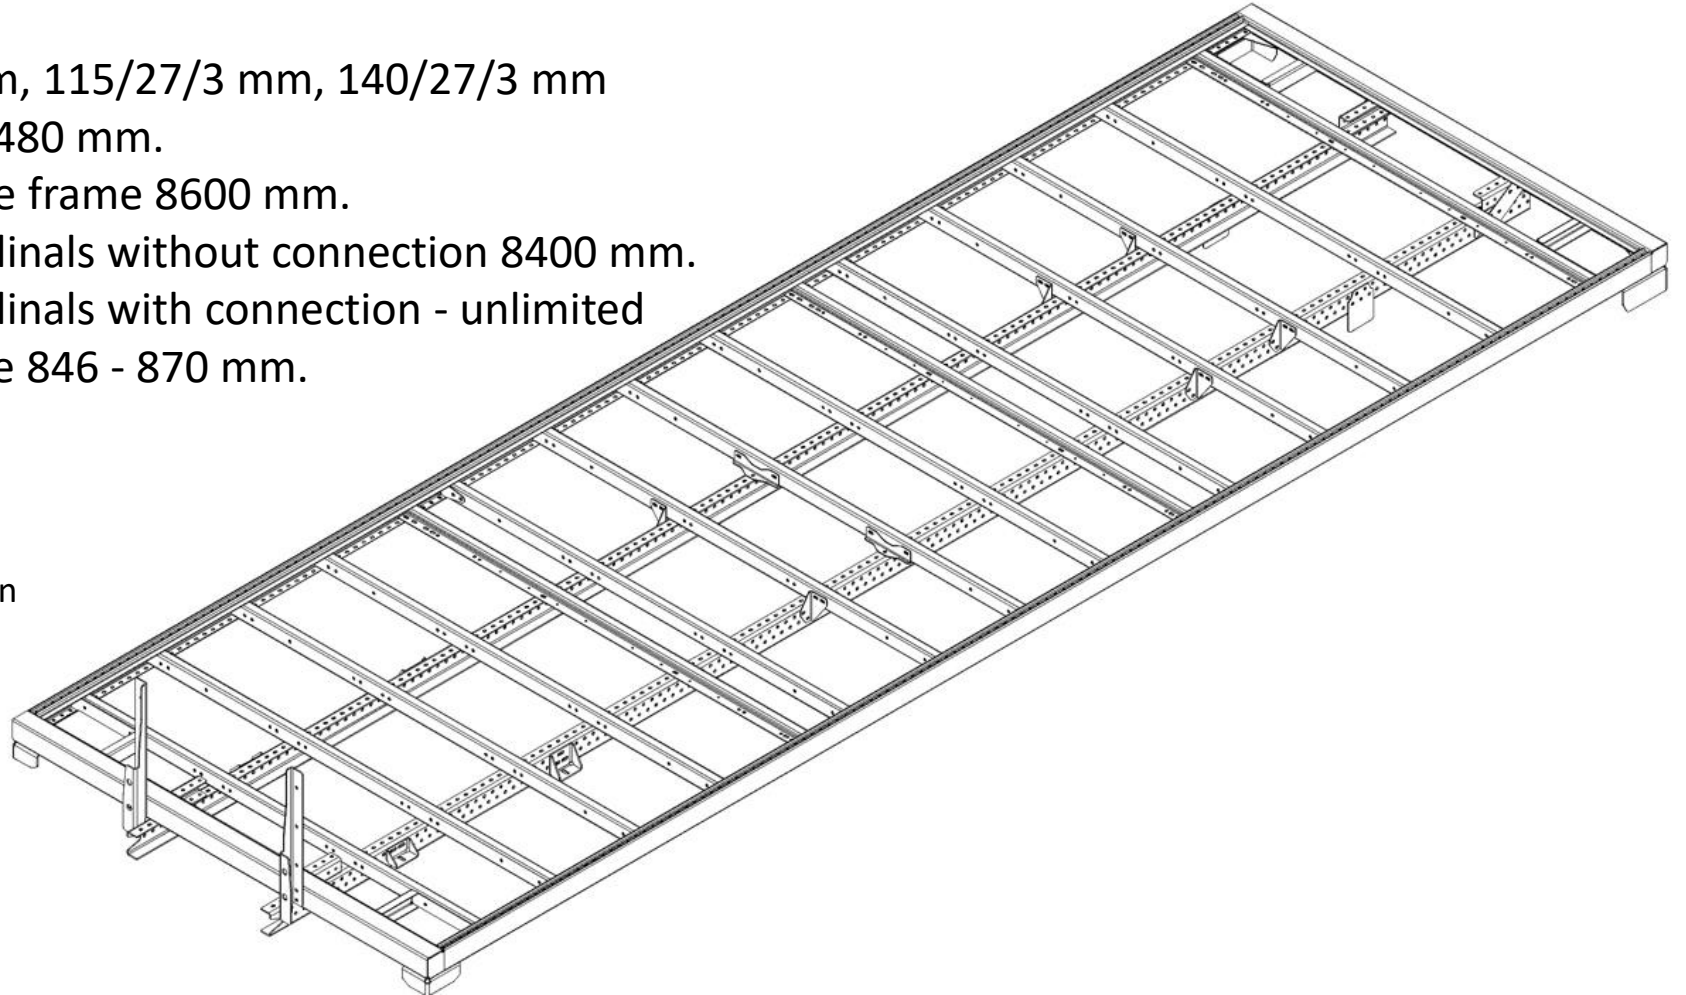


SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS


CF SCREW

Patented extremely strong connection of crossbeam and side rave profile using CF screw.

Alle fasteners in the 10.9. quality with Geomet treatment.

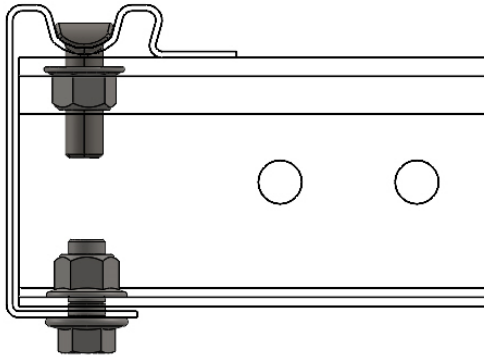

UL 109/21/3 a 115/27/3 mm

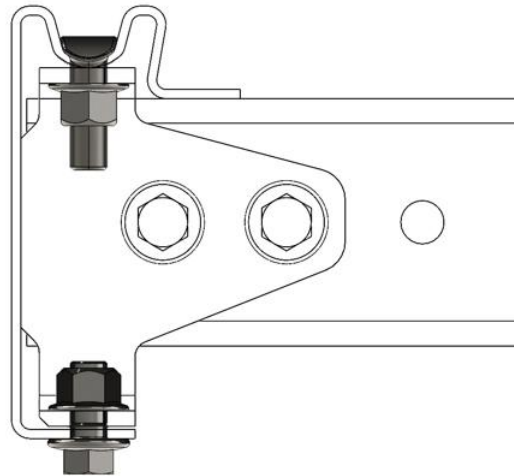

UL 140/27/3 mm



SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS

CERTIFICATED LASHING RINGS

Certified lashing rings in combination with side
rave profile Type UL 3 mm is certified for load
2500 daN.



Variable position of lashing rings every 50 mm




SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS

PLASTIC PLUG


Plastic plugs for sealing of the cargo space.




SIDE RAVE PROFILES

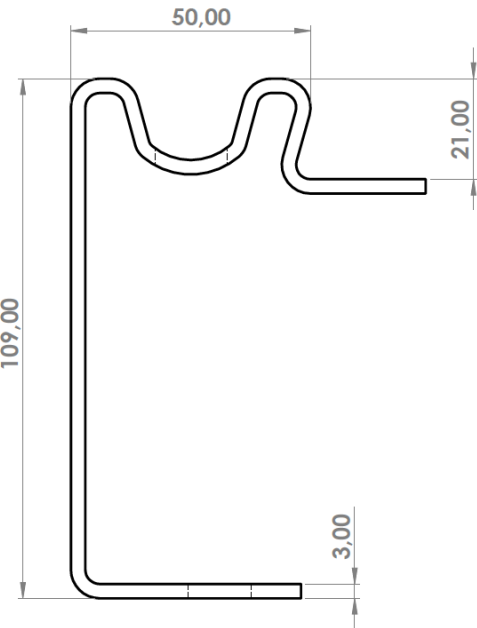


Side rave profile UL
109/21/3 mm
S355MC

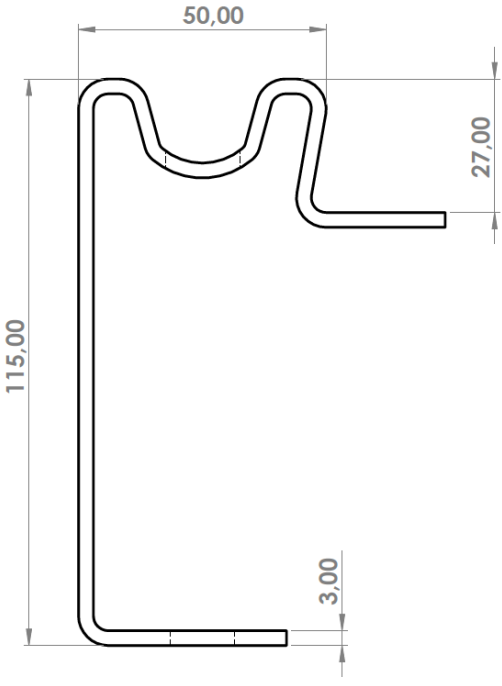


Side rave profile UL
115/27/3 mm
S355MC

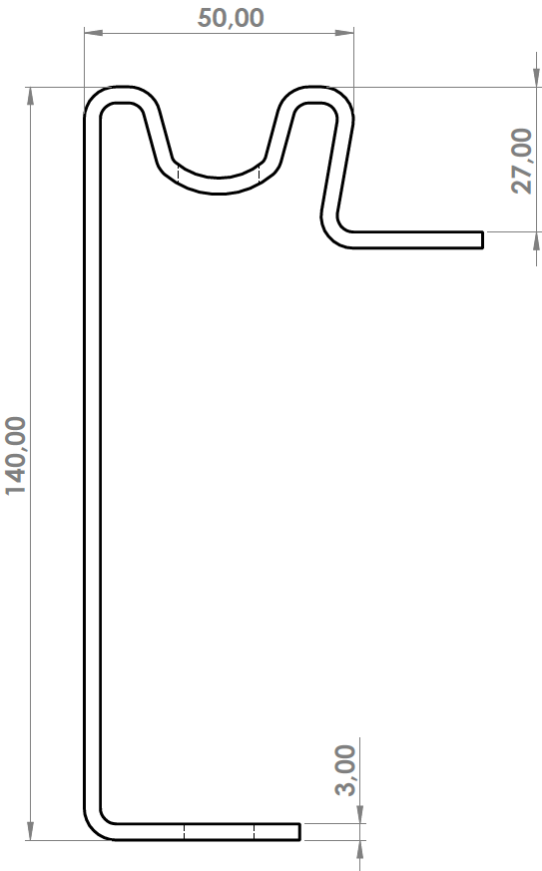


Side rave profile UL
140/27/3 mm
S355MC

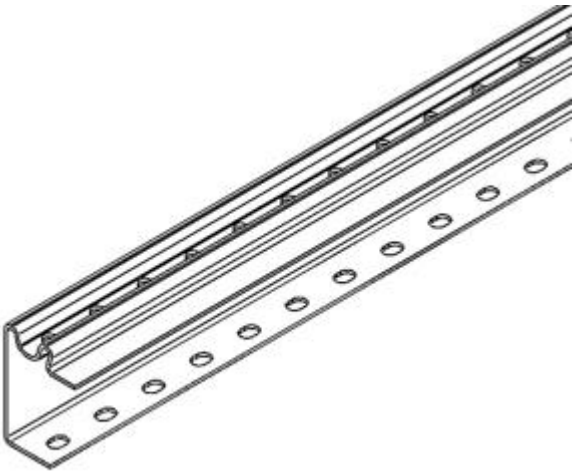


CROSSBEAM

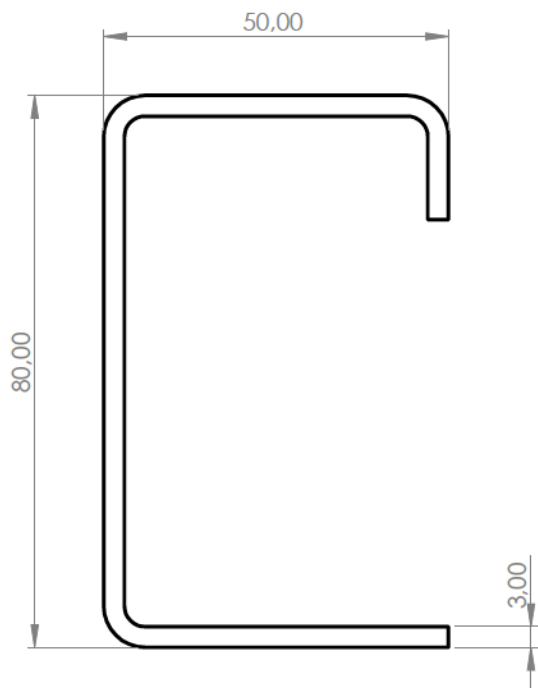

Crossbeam
80x50x3 mm
S355MC

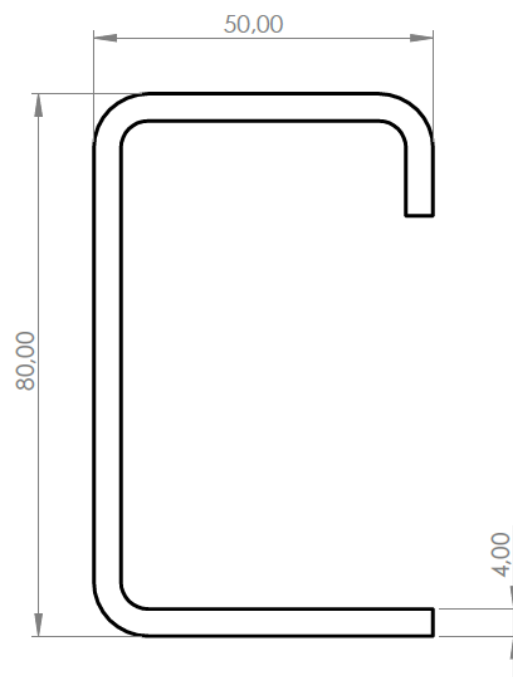


Crossbeam
80x50x4 mm
S355MC

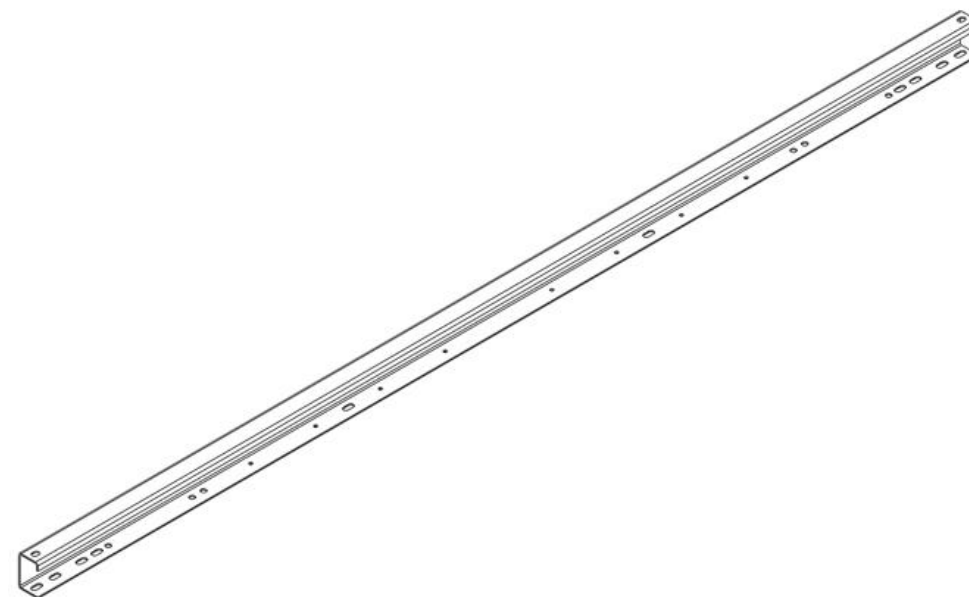


SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS

LONGITUDINAL 100 mm



Standard stock lengths 7800 and 8400 mm.

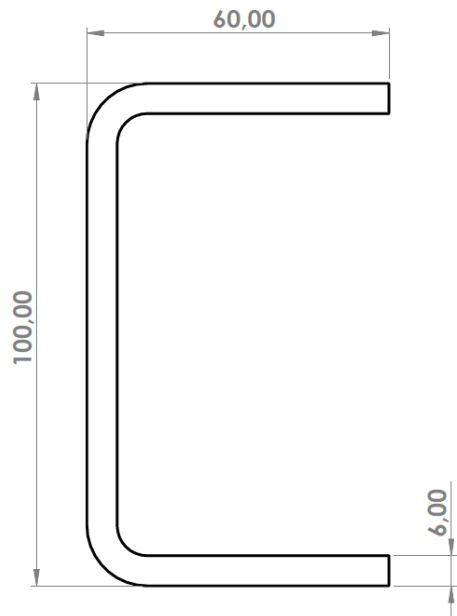

Longitudinal C
100/60/6 mm
S355MC

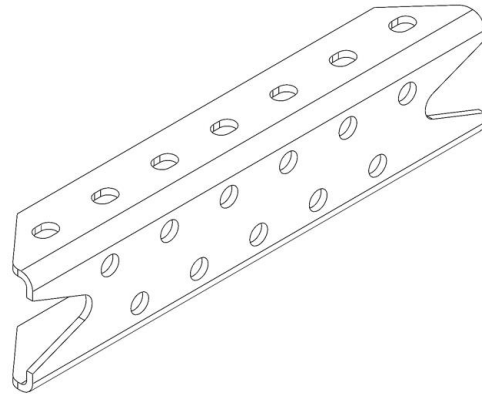


Longitudinal connector 100-5 mm
S355MC

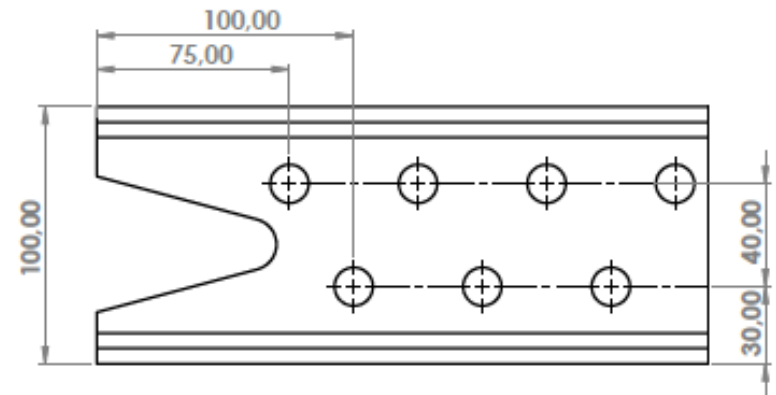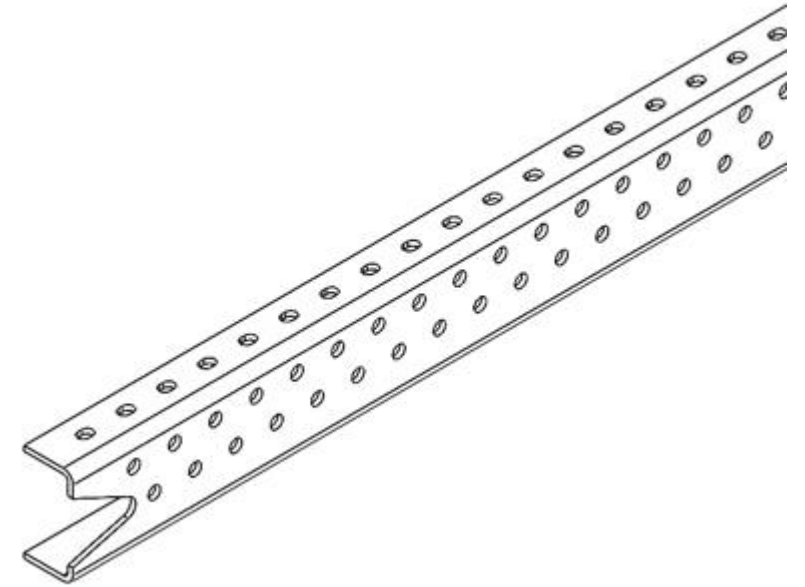


SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS

LONGITUDINAL 120 mm



Standard stock lengths 7800 and 8400 mm.

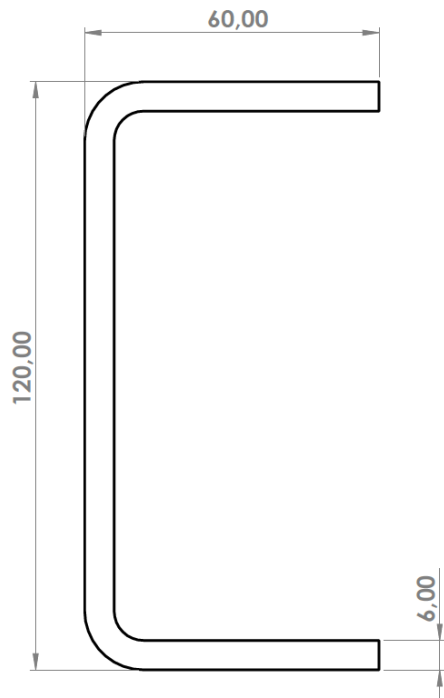

**Longitudinal C
120/60/6 mm
S355MC**

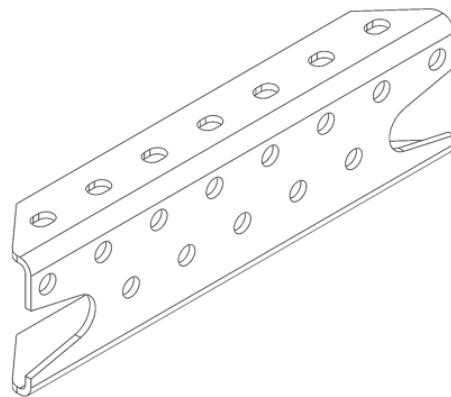


**Longitudinal connector 120-5 mm
S355MC**

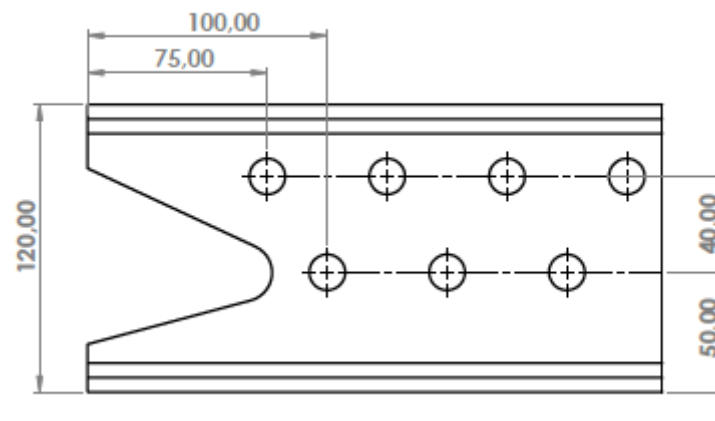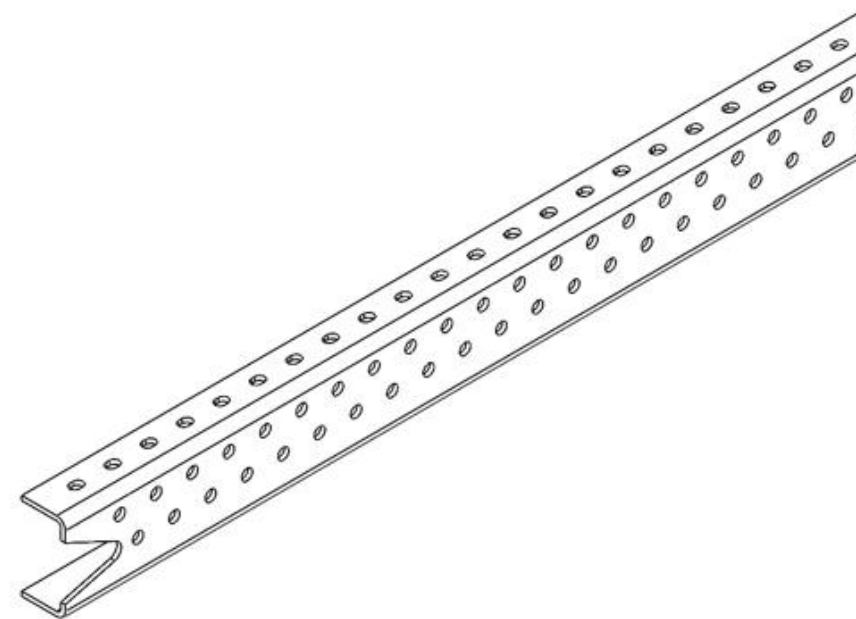

SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS


FRONT AND REAR TRAVERSE

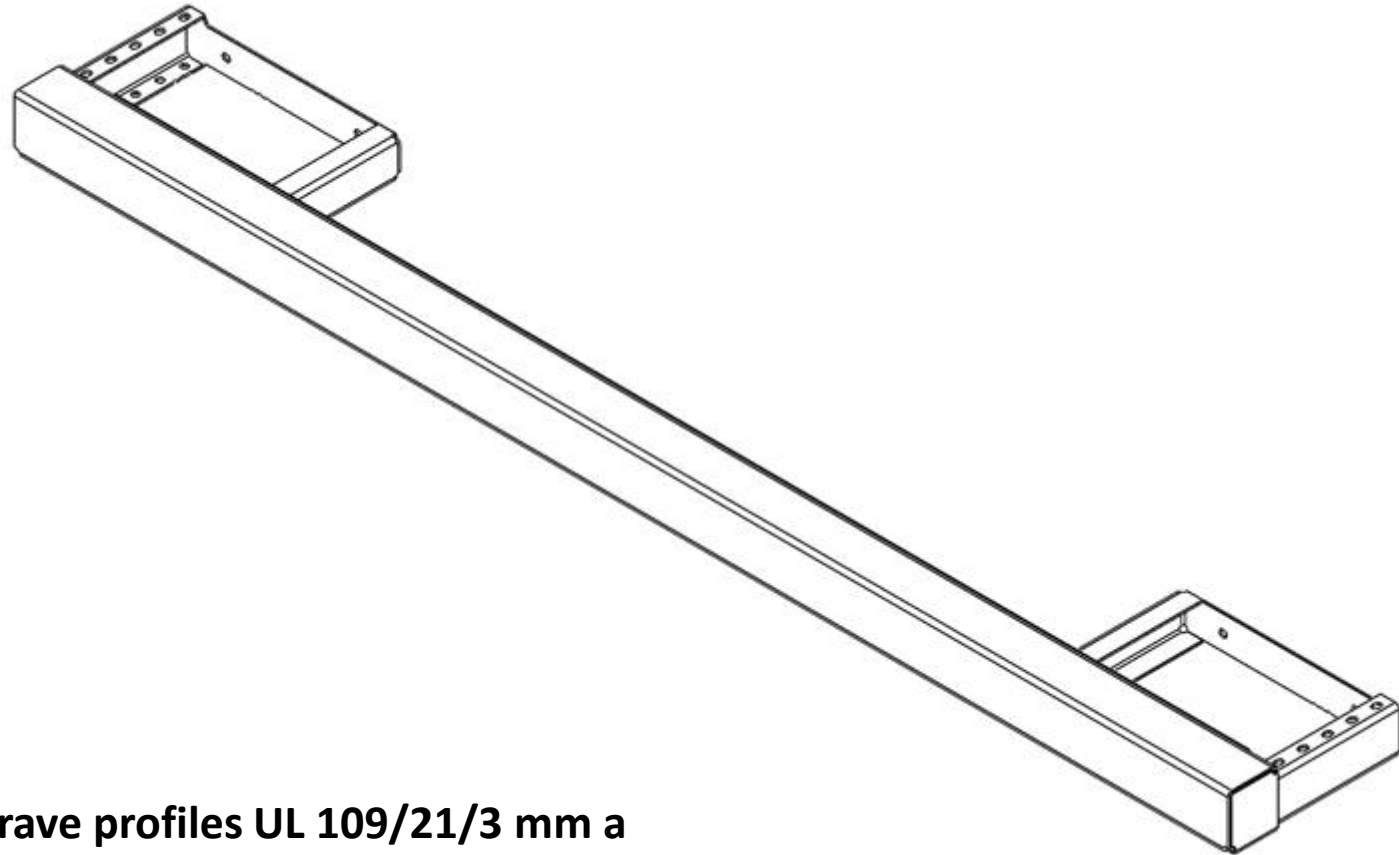

**Front and rear traverse for side rave profiles UL 109/21/3 mm a
115/27/3 mm S355MC**


SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS

FRONT AND REAR TRAVERSE

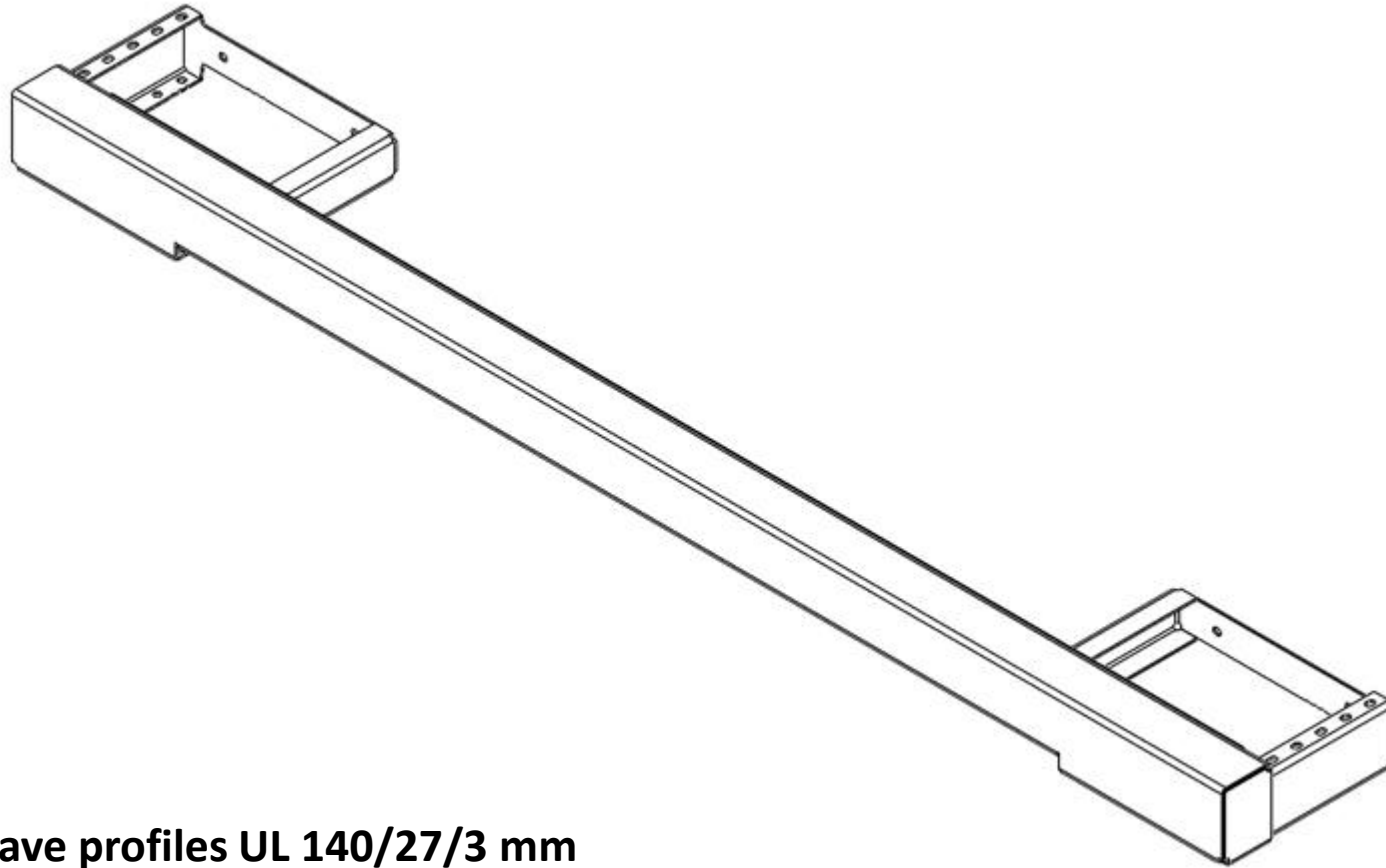


**Front and rear traverse for side rave profiles UL 140/27/3 mm
S355MC**


BRACKETS

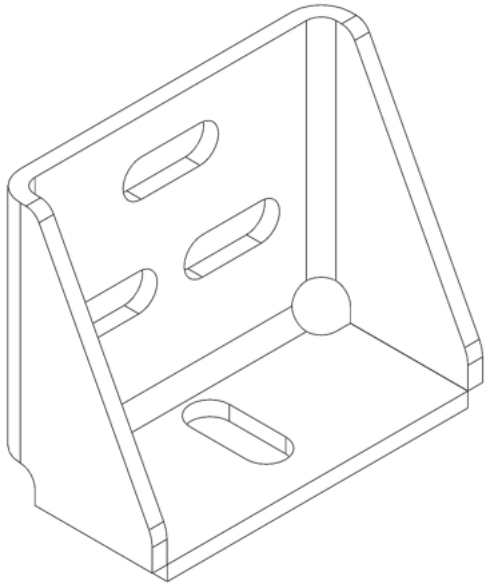


**Bracket 135x110-6 mm UNI
S355MC**

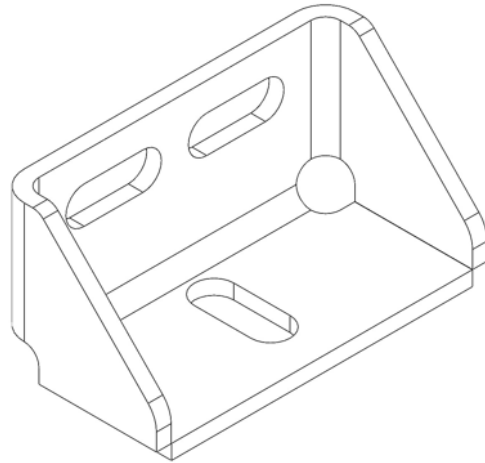

**Bracket 135x67-6 mm UNI
S355MC**

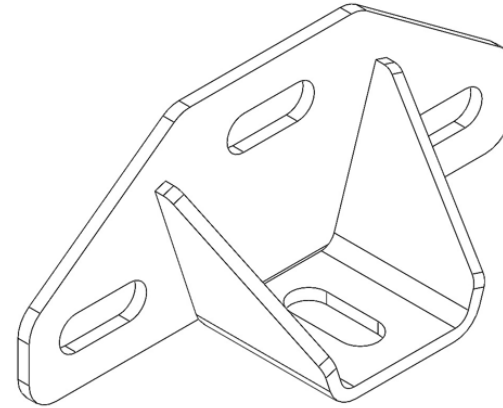


**Bracket wide 218x90-6 mm
UNI
S355MC**

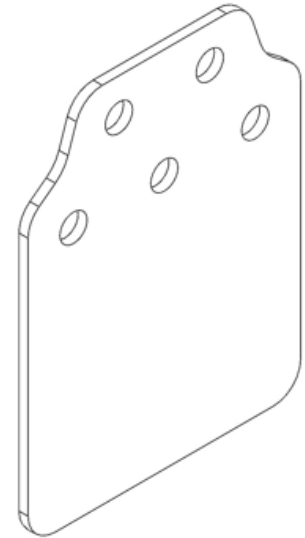


**Guide plate 150x200-5mm
S355MC**


ACCESSORIES

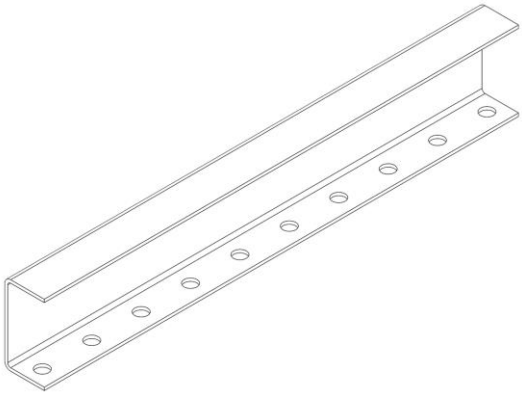


Floor support
480x80x40-3 mm
S355MC

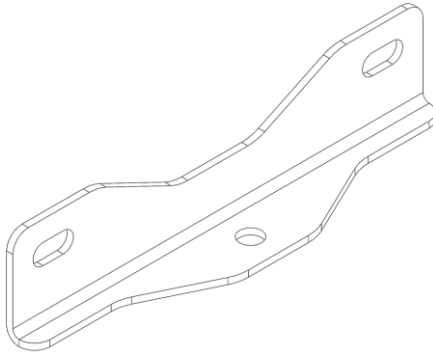

Crossbeam support
horizontal
S355MC

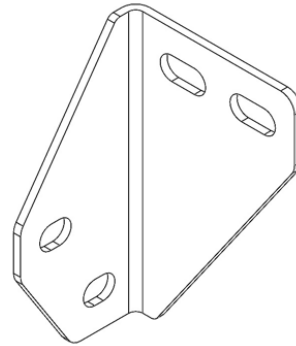


Crossbeam support
vertical L/R
S355MC

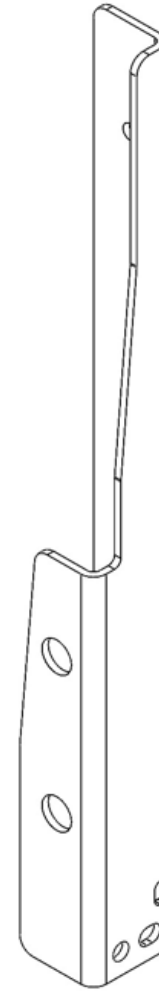


Front wall reinforcement 690-6 mm L/R
S355MC


ACCESSORIES

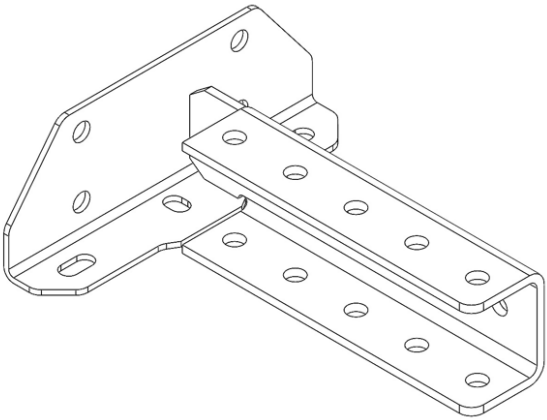


**Traverse extender 290x80-6
mm L/R
S355MC**

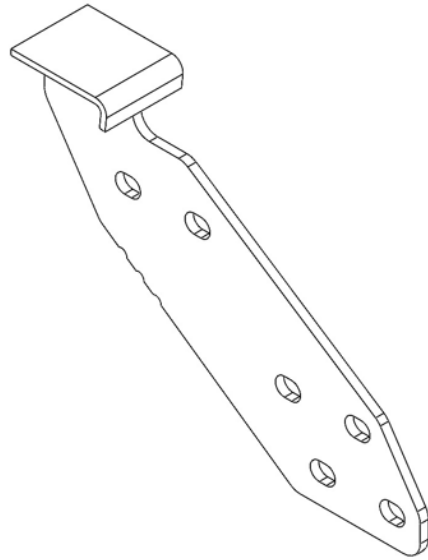

**Rear traverse support
S355MC**

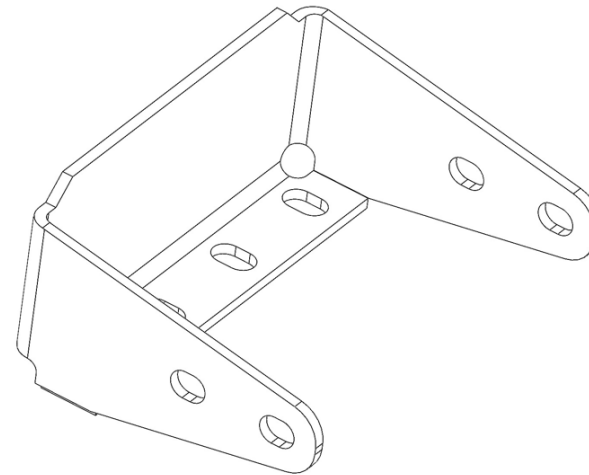


**Pillar bracket
reinforcement
S355MC**

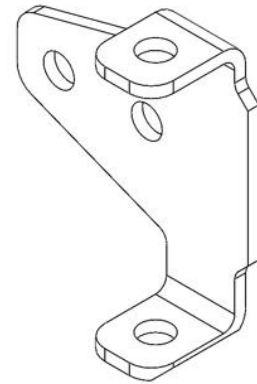


**Crossbeam anchor 140-5 mm L/R
S355MC**

ACCESSORIES

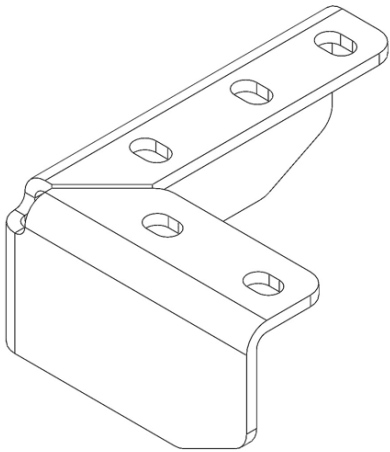

**Corner extender 195x150x80-6 mm L/R
S355MC**

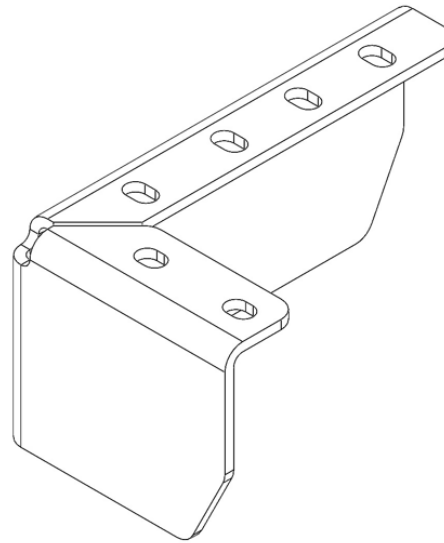

**Corner extender 265x150x125-6 mm L/P
S355MC**

ORDERING PARAMETERS


B – Outside width
Standard 2480 mm

L – Outside length
step 50 mm, maximum 8600 mm


W – Longitudinal distance
according the truck chassis

M1,M2 – side pillar position

Individual dimensions and technical solution are possible on request

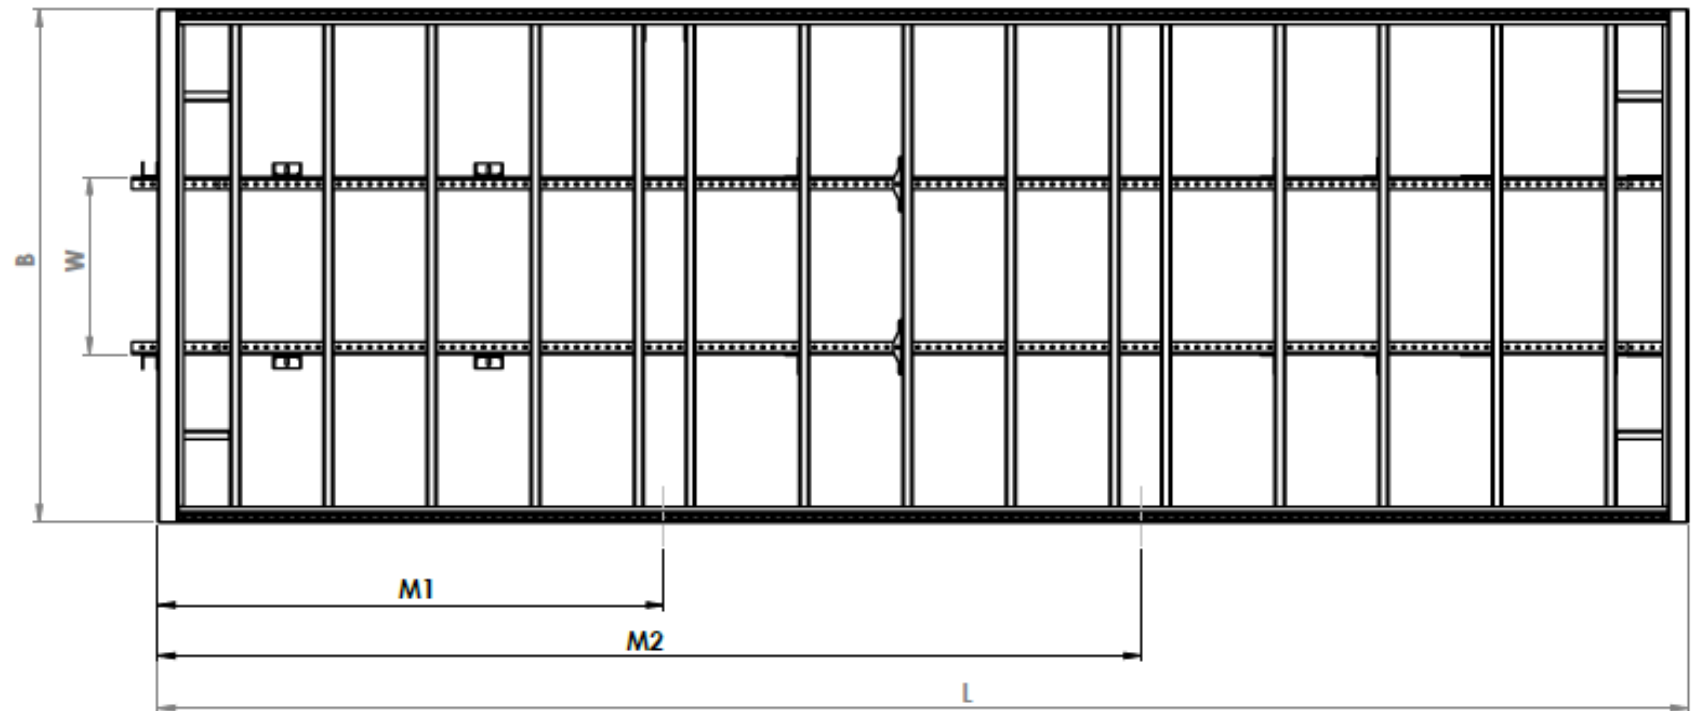

ORDERING PARAMETRS

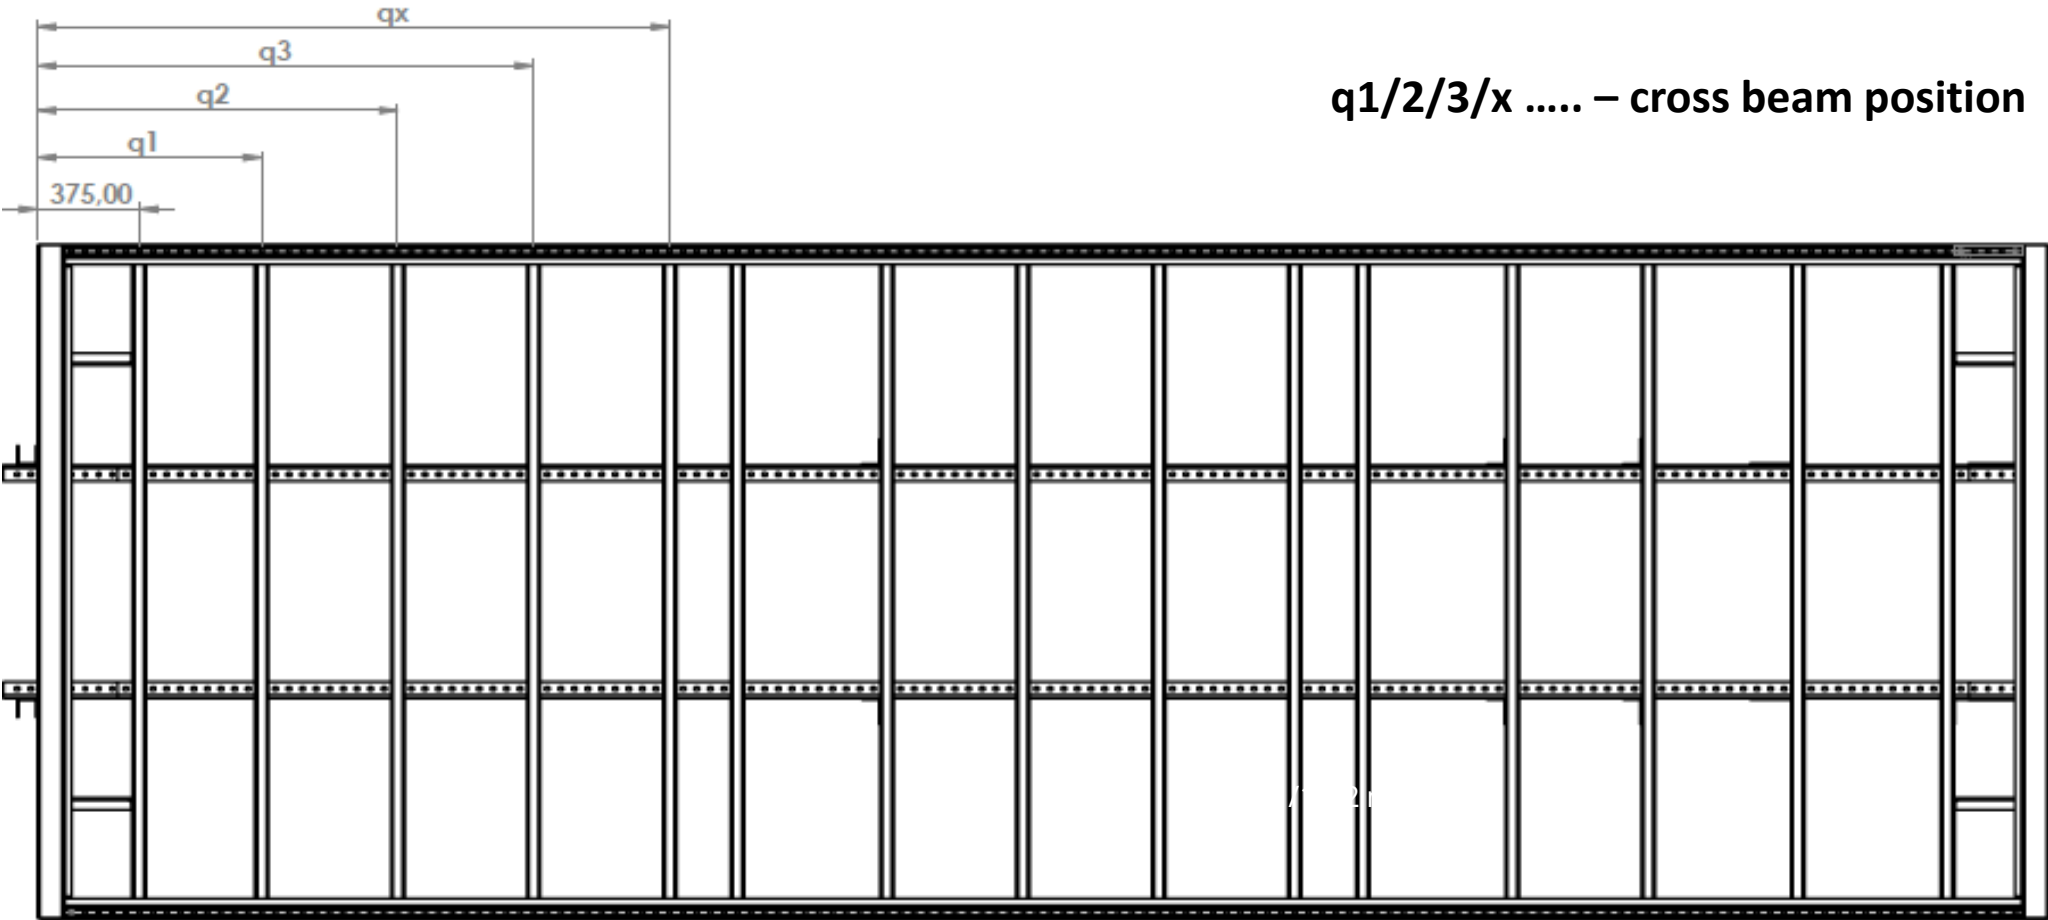


ORDERING PARAMETRS

Pp – Front overlap

Standard 25/75/125/175/.....á 50 mm

By using of the front reinforcements is Pp dimension minimum 125 mm

Individual dimension on request

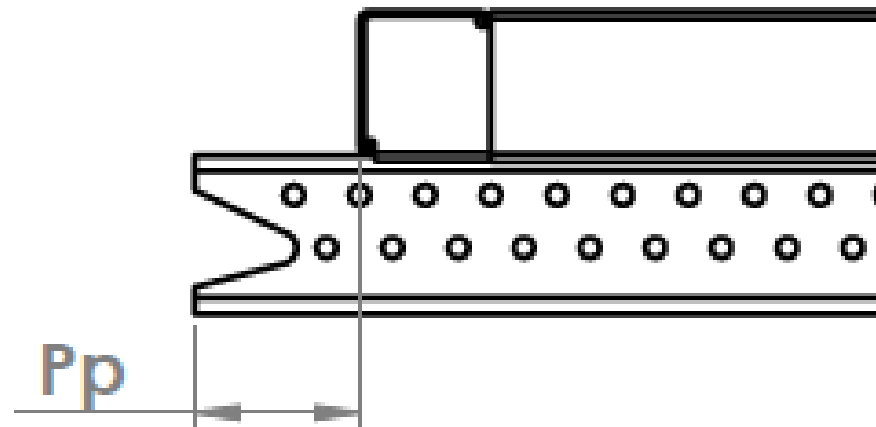


ORDERING PARAMETERS

Pz – Rear overhang


Standard 0 - 150 mm

Individual dimension on request

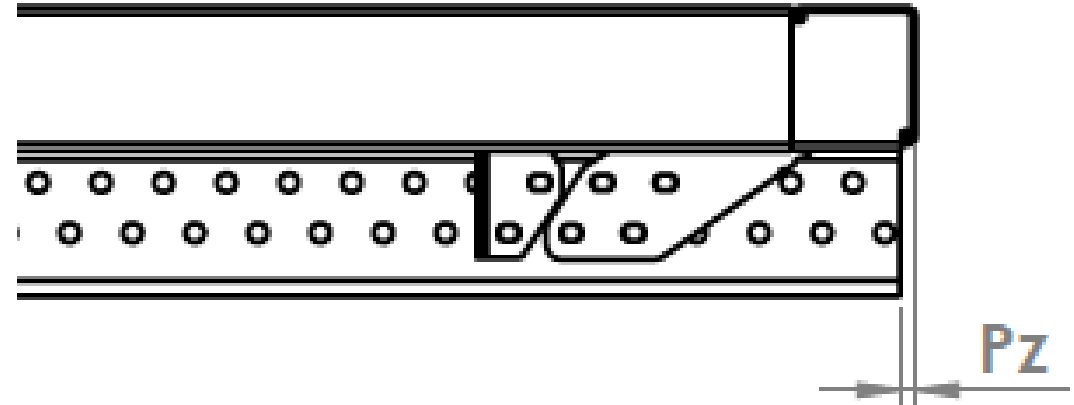


ORDERING PARAMETRS

Longitudinal 100 mm combination with brackets

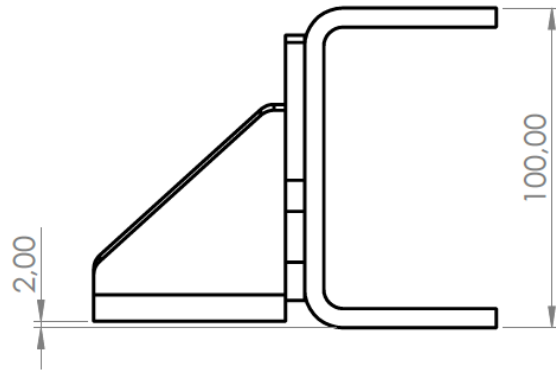


Bracket wide 218x90-6 mm

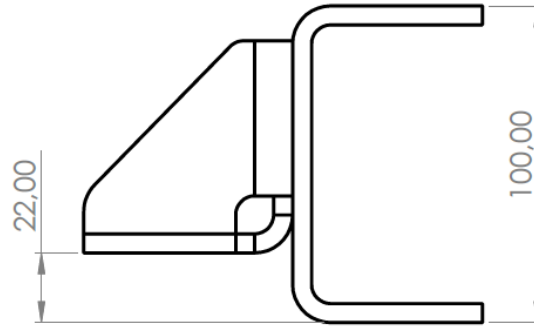


Bracket 135x67-6 mm

ORDERING PARAMETRS


Longitudinal 120 mm combination with brackets

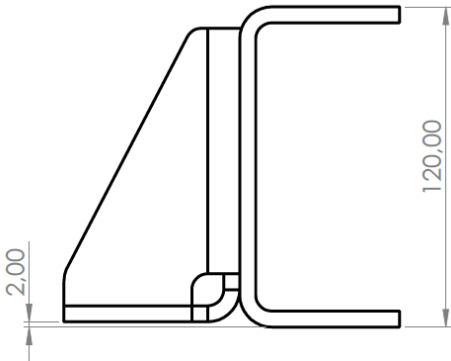


Bracket 135x110-6 mm

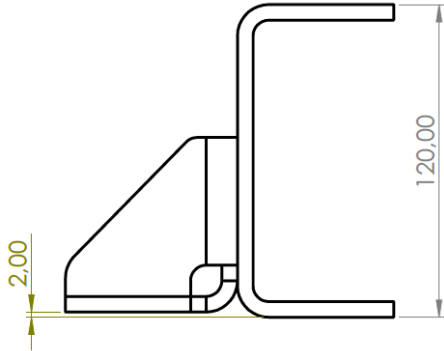

Bracket 135x67-6 mm
Lower position

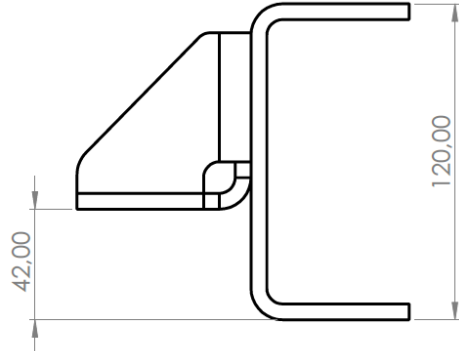

Bracket 135x67-6 mm
Upper position

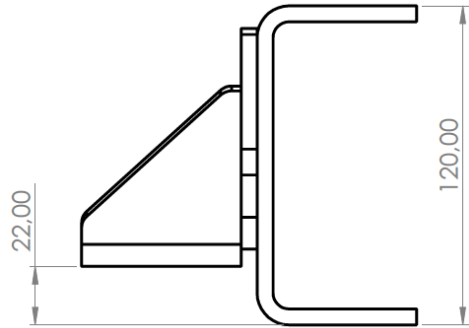

Bracket wide 218x90-6 mm

SCREWABLE STEEL SUBFRAMES SRV180 UP TO 18 TONS

CONTACT

CARGOFRAMES

www.cargoframes.eu

Ing. Zdeněk Lhoták
Tel: +420 721 669 712
Email: z.lhotak@cargoframes.eu

Ing. Aleš Hoferek
Email: a.hoferek@cargoframes.eu

CARGO FRAMES s.r.o., Komerční 524, Nupaky – Praha Východ - 251 01