




CARGO FRAMES

Screwable steel subframes SRV75 up to 7,5 tons



CONTENT

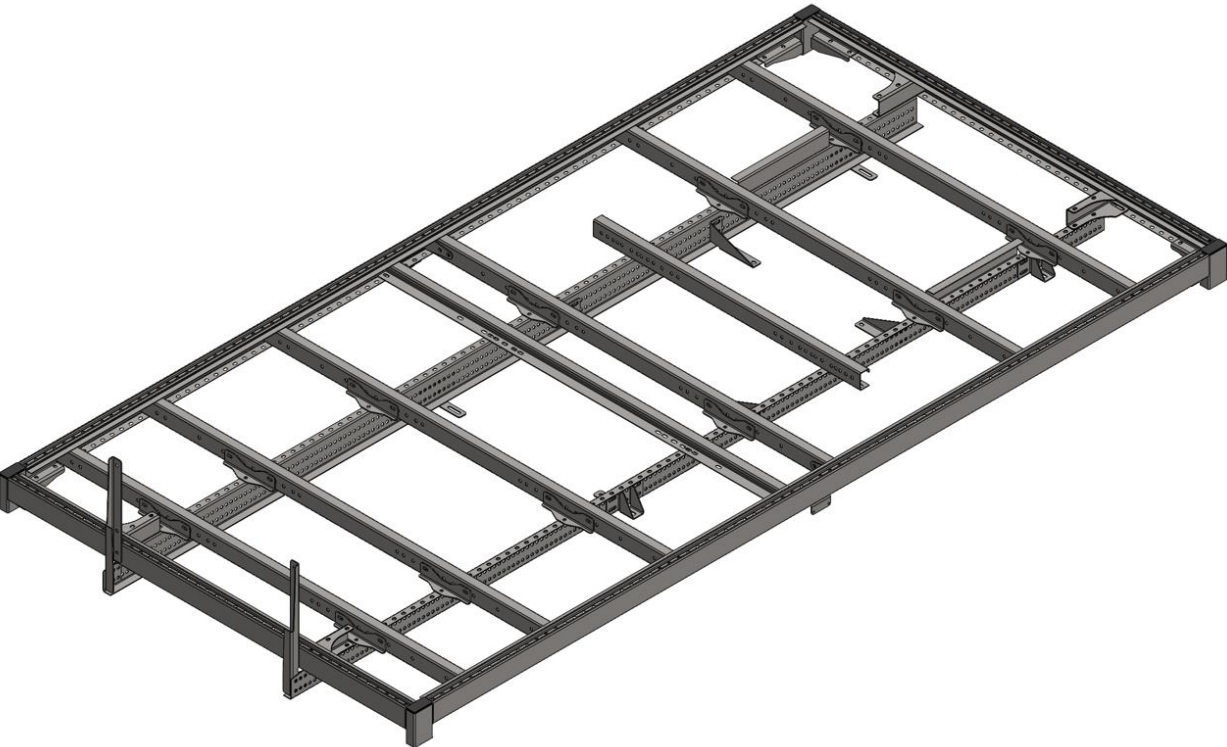

Applicable	3
Weights	4
CF Screw	5
Certified lashing ring	6
Plastic plugs	7
Side rave profiles	8
Cross beams	9
Longitudinals	10
Brackets	12
Corners	13
Accessories	14
Ordering parameters	16
Contact	20

SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

APPLICABLE

Maximal standard width 2280 mm
Maximal standard length 5200 mm
Floor thickness 15/18 mm
Gross weight up to 7,5 tons

MB Sprinter
Iveco Daily
Renault Master
Ford Transit
Fiat Ducato
Citroen Jumper
Peugeot Boxer
VW Transporter/CRAFTER
MAN TGE
Mitsubishi Fuso
Hyundai H350



SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

WEIGHTS

6 EUR pallets

3400x2100 mm	167 kg
3400x2280 mm	174 kg

8 EUR pallets

4200x2100 mm	179 kg
4200x2280 mm	185 kg

10 EUR pallets

5000x2100 mm	192 kg
5000x2280 mm	198 kg



The listed weights includes complete subframe including fasteners. Bracket weight depending on the type of the chassis cca 7-10 kg.



CF SCREW

Patented extremely strong connection of crossbeam and side rave profile using CF screw.

Fasteners in the 10.9. quality with Geomet treatment.

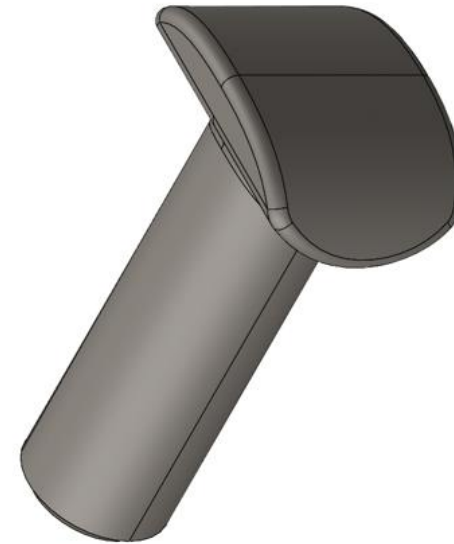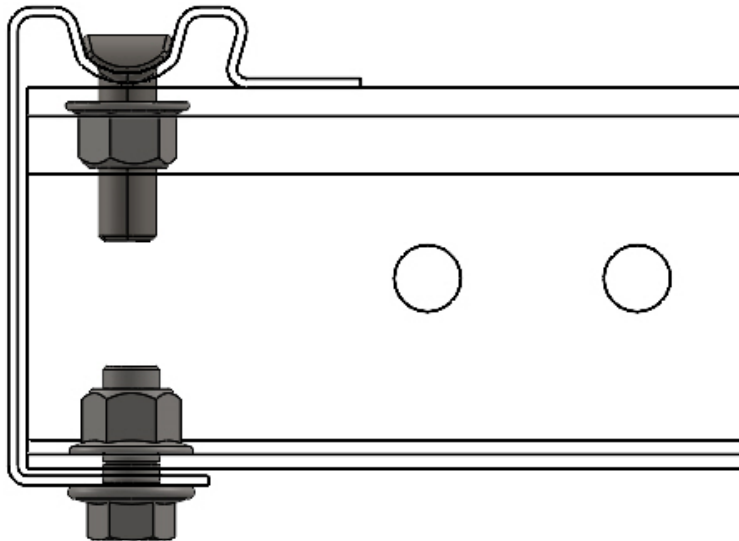

SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

LASHING RINGS

Certified lashing rings in combination with side rail profile Type UL 2 mm is certified for load 1500 daN.



Flexible lashing rings position with step 50 mm.



SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS


PLUGS

Plastic plugs for sealing the cargo space.




SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

SIDE RAVE PROFILES

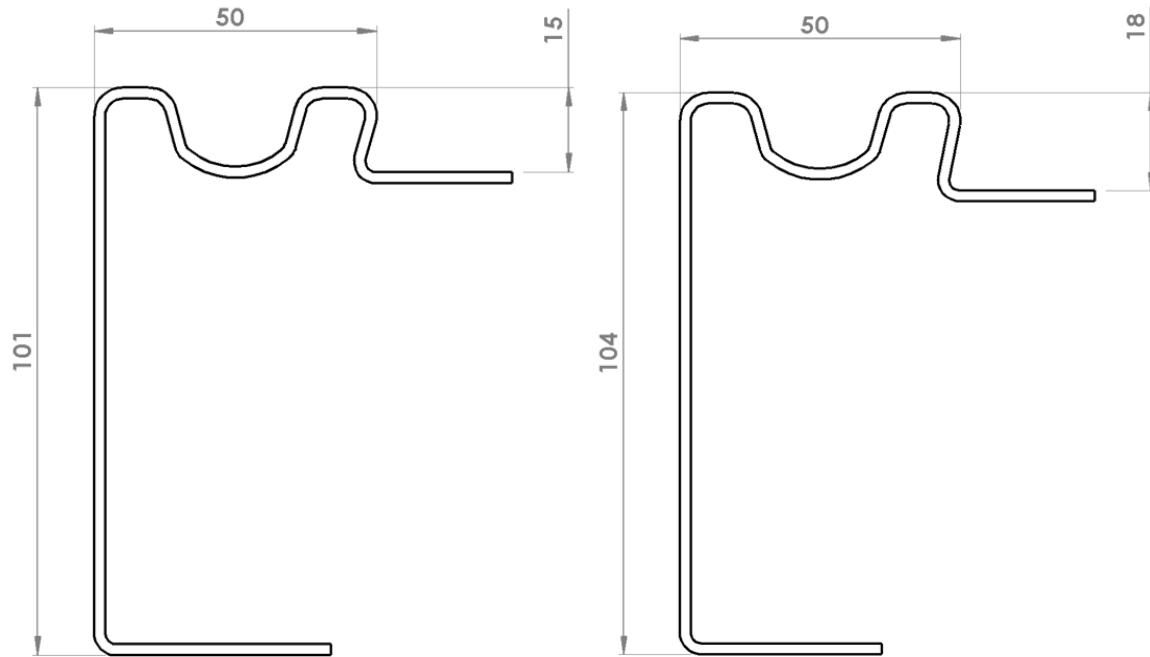


Side rave profile Typ UL
101/15/2 mm
S355MC

Side rave profile Typ UL
104/18/2 mm
S355MC

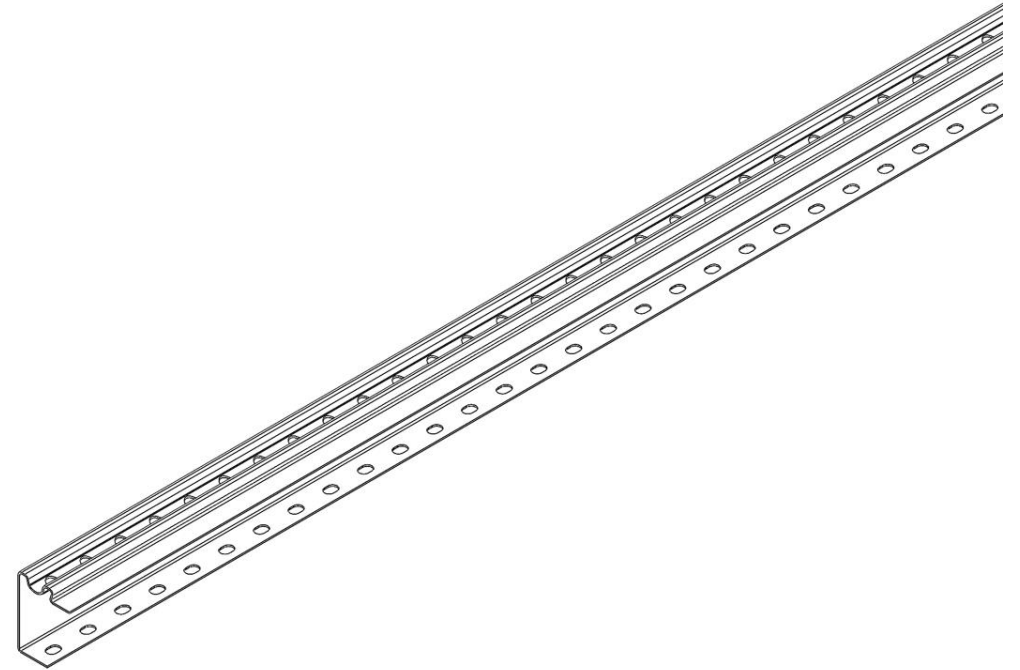


SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

CROSS BEAM

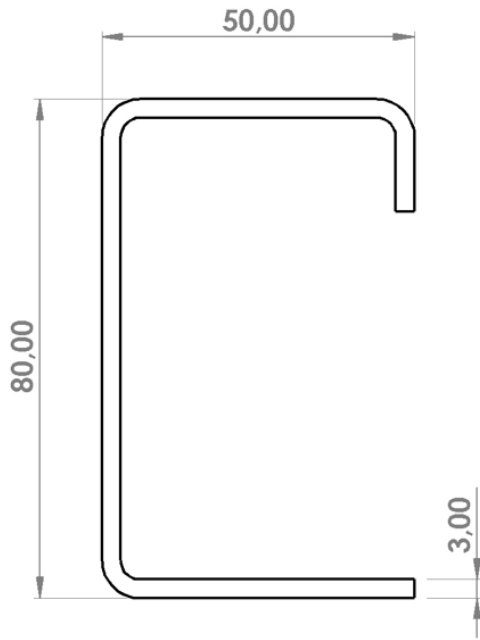


Cross beam
80x50x3 mm
S355MC

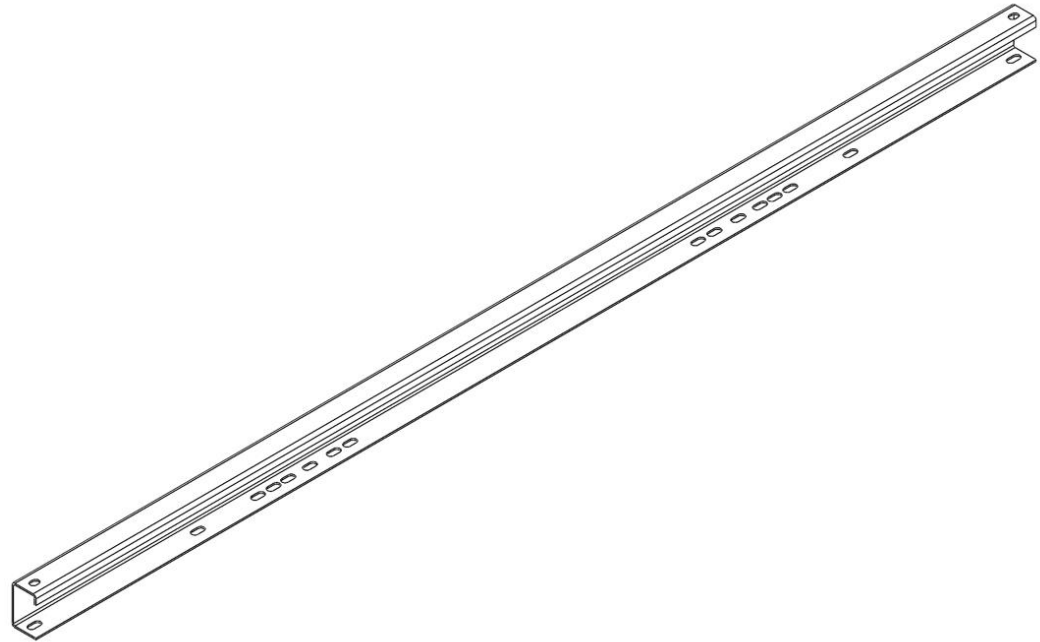


SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

LONGITUDINALS

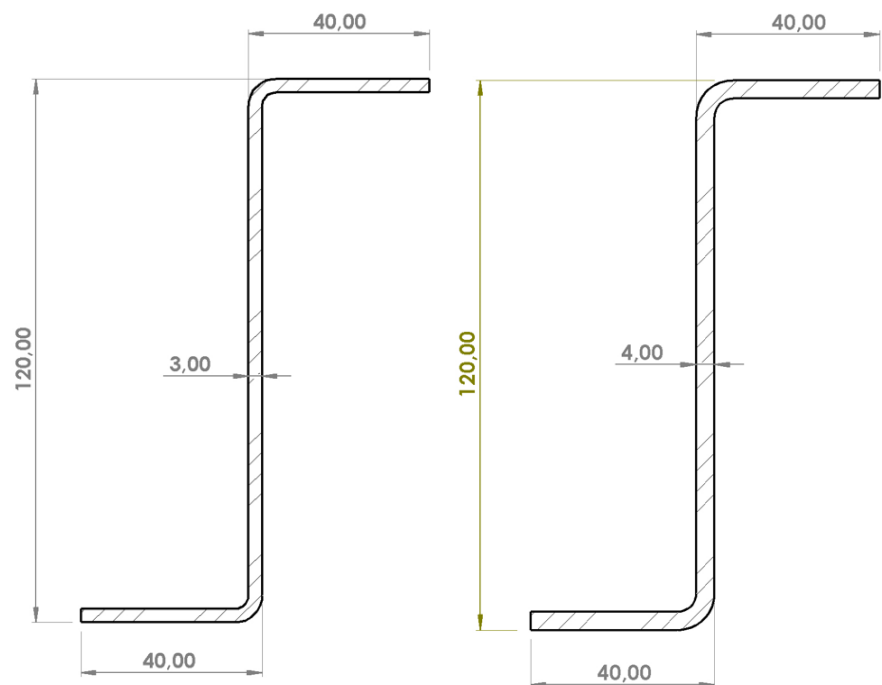


Longitudinals Z
120/30/3 mm
S355MC


Longitudinals Z
120/30/4 mm
S355MC

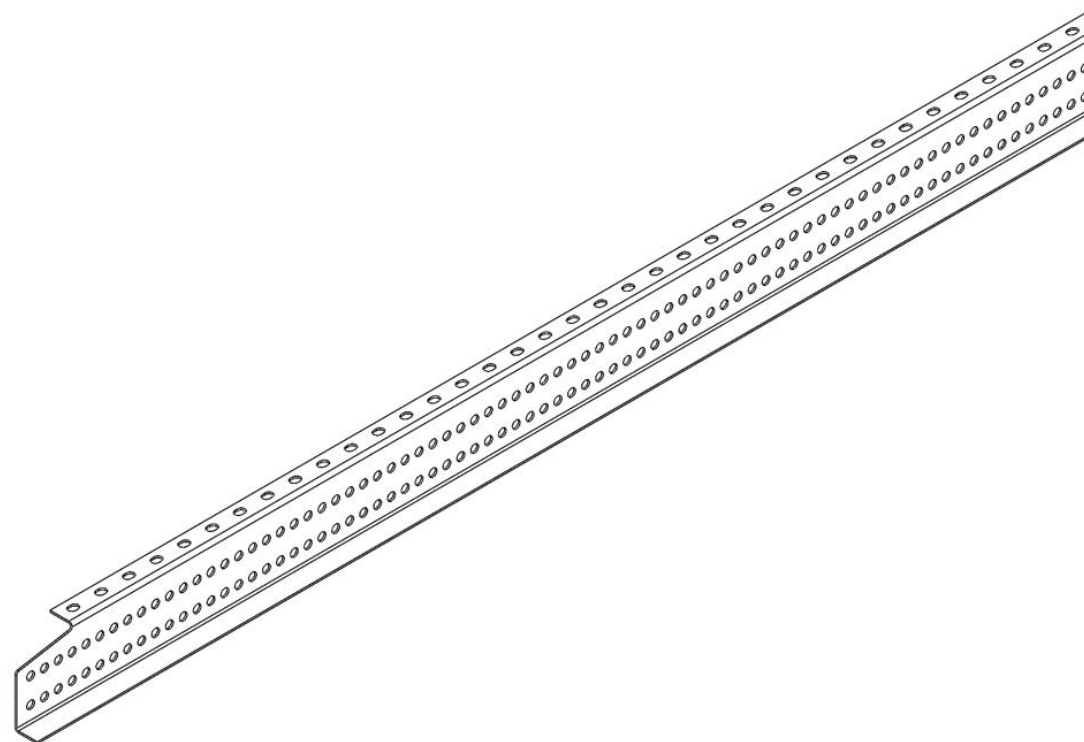

LONGITUDINALS

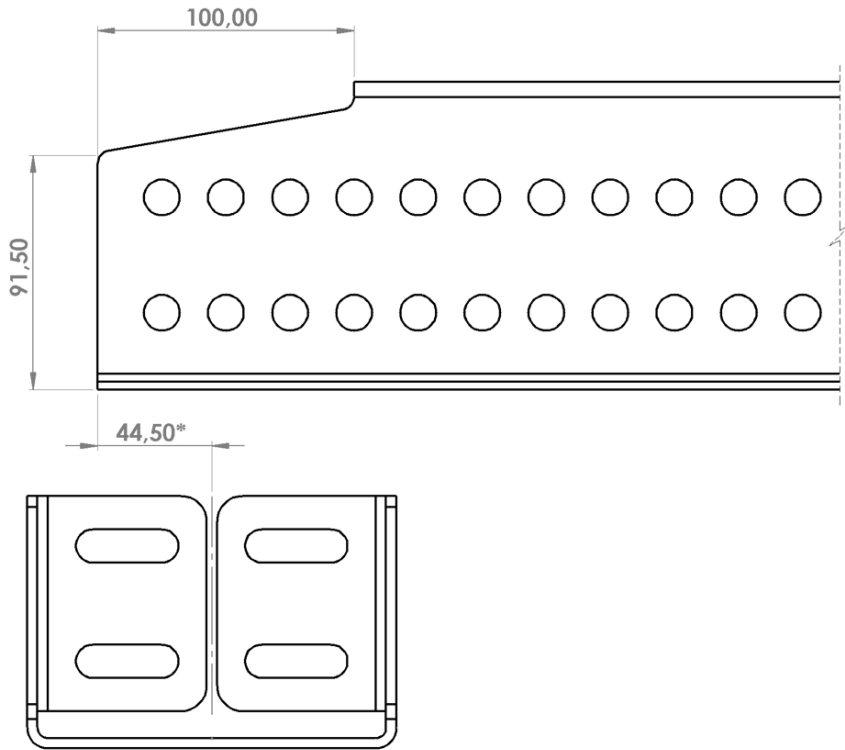

Universal front cut

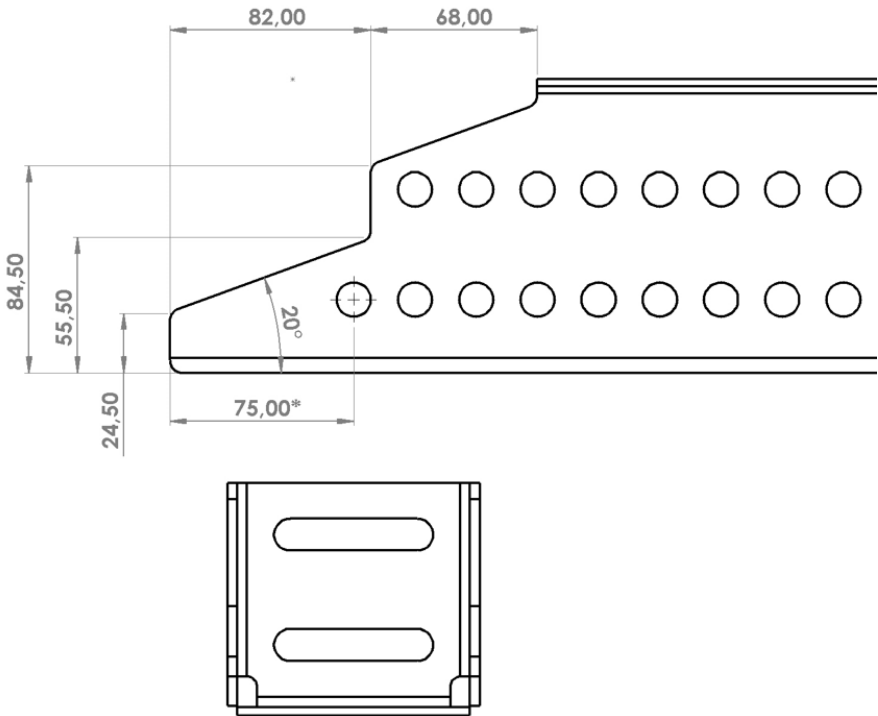


Front cut IVECO Daily


* Limit position of the beginning of the longitudinals to the middle of the first bracket.

SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS


BRACKETS

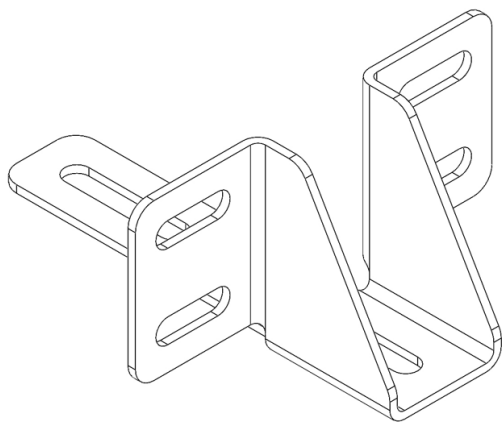


**Universal
S355MC**

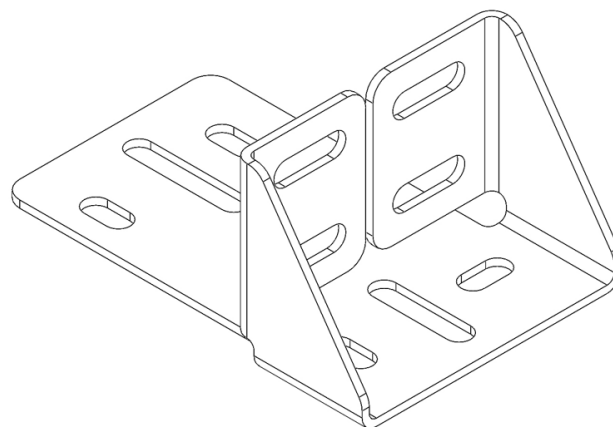

**Front universal
S355MC**

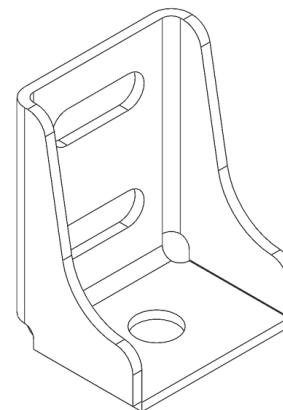


**Iveco Daily
S355MC**

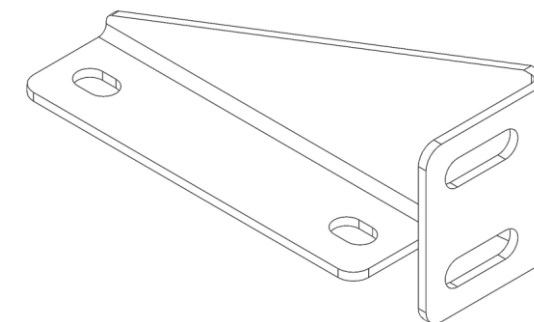


**MB Sprinter inner
S355MC**

SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

CORNERS

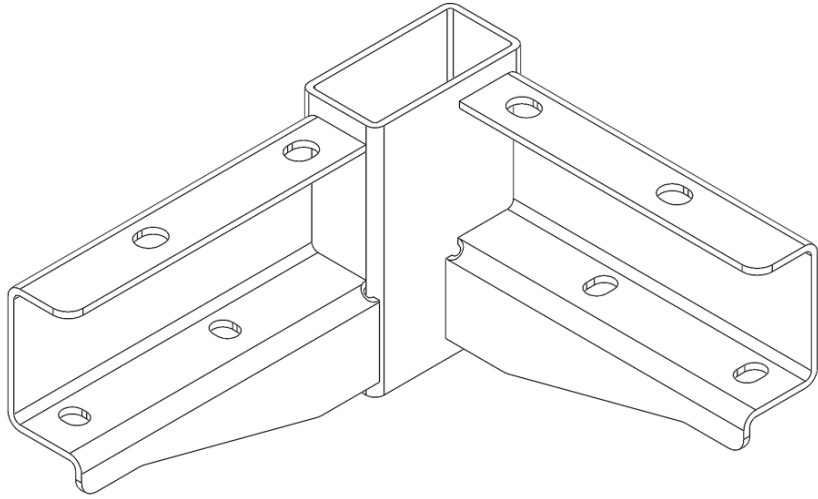


**Corner 100x50x4 mm
S355MC**

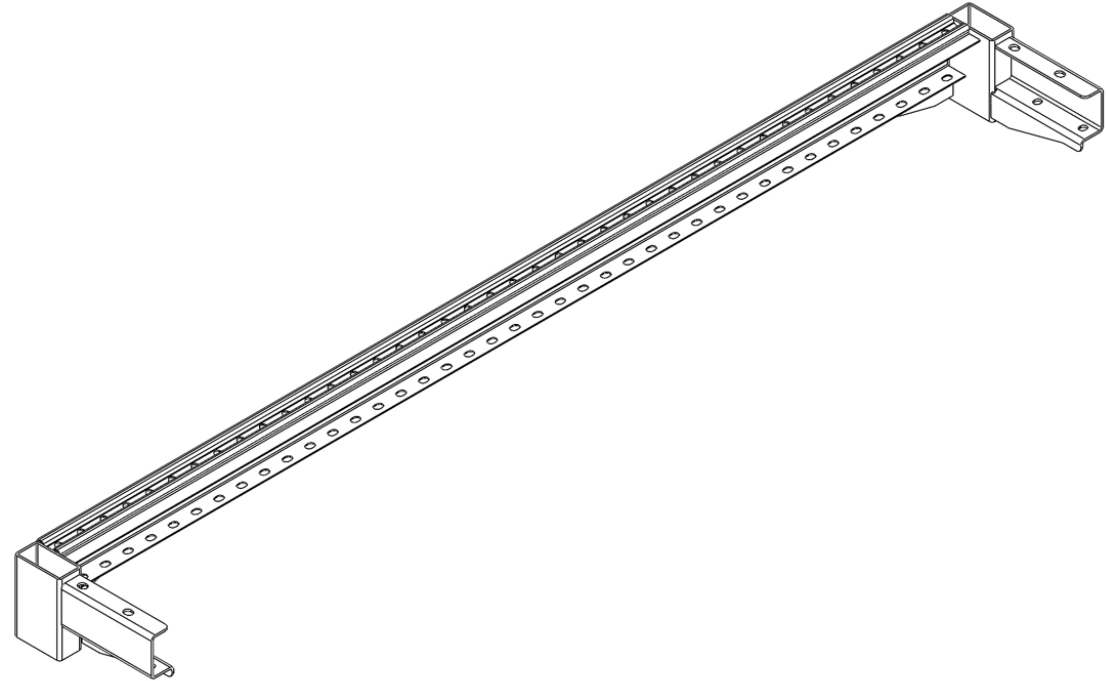


**Front/rear traverse
S355MC**

ACCESSORIES

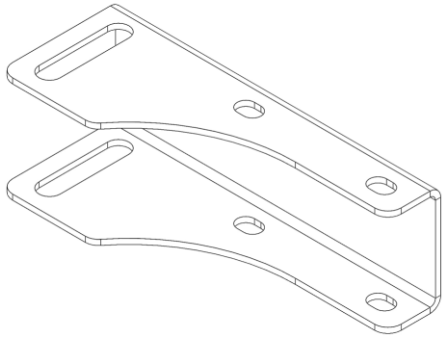


**Extender
S355MC**

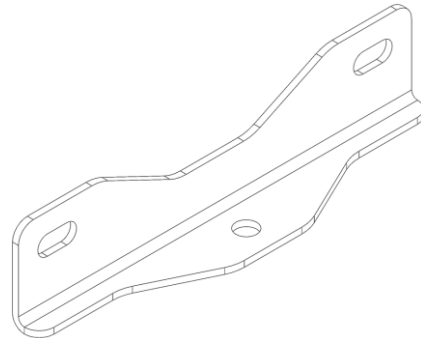


**Reinforcement
crossbeam/longitudinals**

S355MC

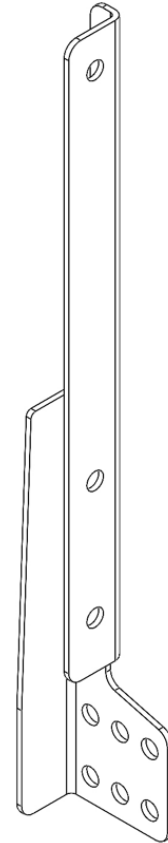


**Front wall
reinforcement
S355MC**

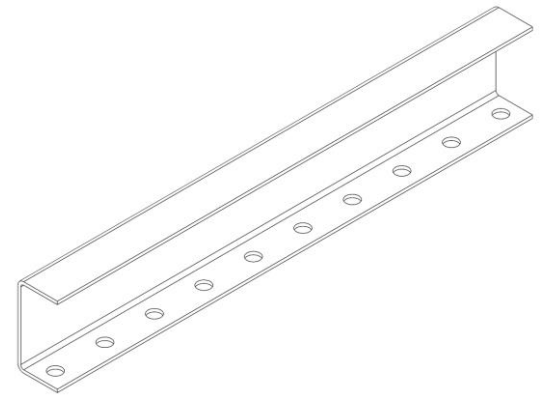


**Floor support
S355MC**

ACCESSORIES

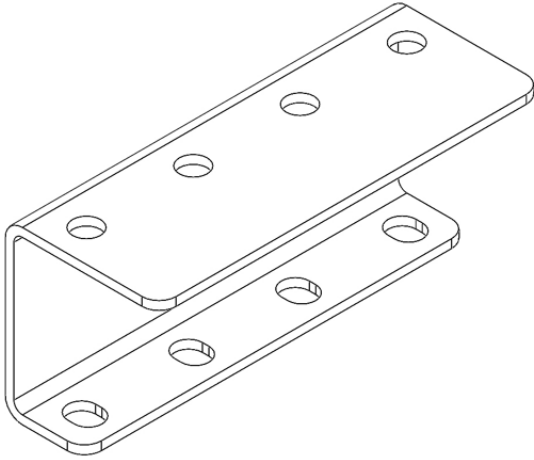

**Pillar pocket
reinforcement - basic
S355MC**

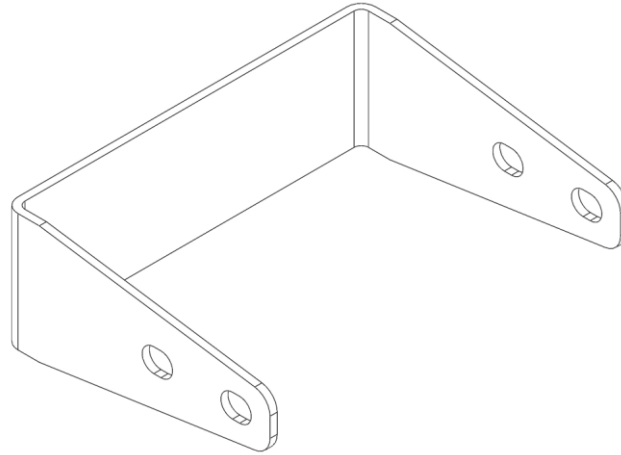

**Pillar pocket reinforcement –
with cross beam fastening
S355MC**

ORDERING PARAMETERS

B – outside width

2100/2200/2280 mm

L – outside length


step 50 mm, maximum 5300 mm

W – crossbeam step

According chassis type

M – side pillar position

Individual length and width on demand.

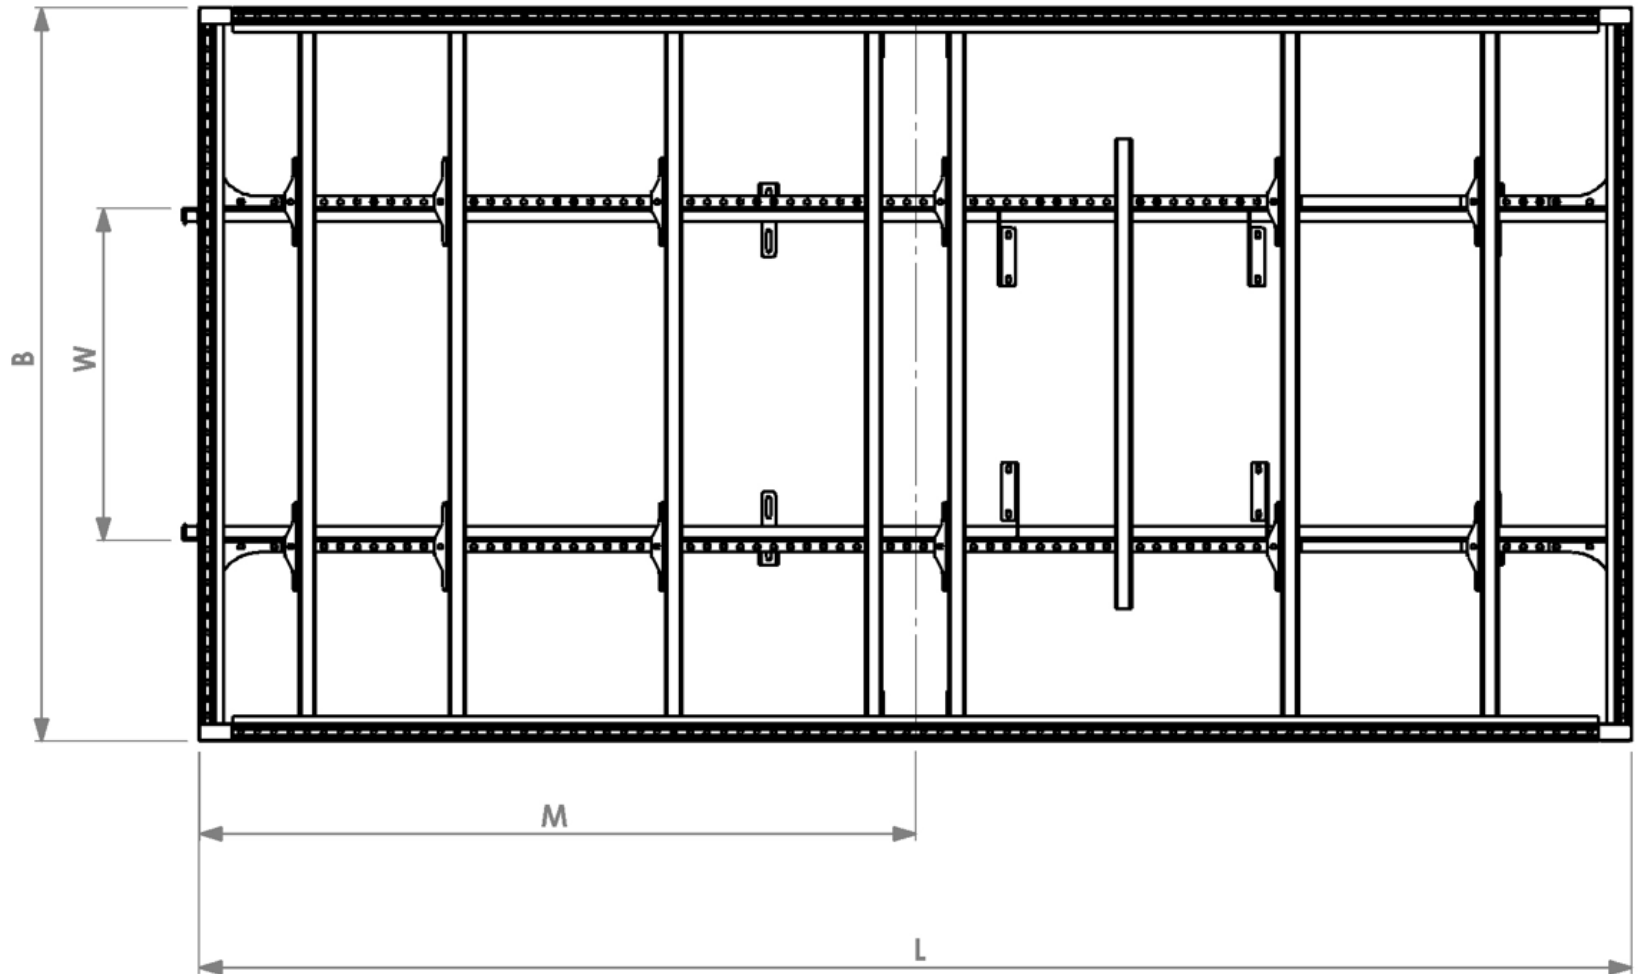


ORDERING PARAMETERS

$q1/2/3 \dots$ – crossbeam position

qk – short crossbeam position

k – length of the short crossbeam


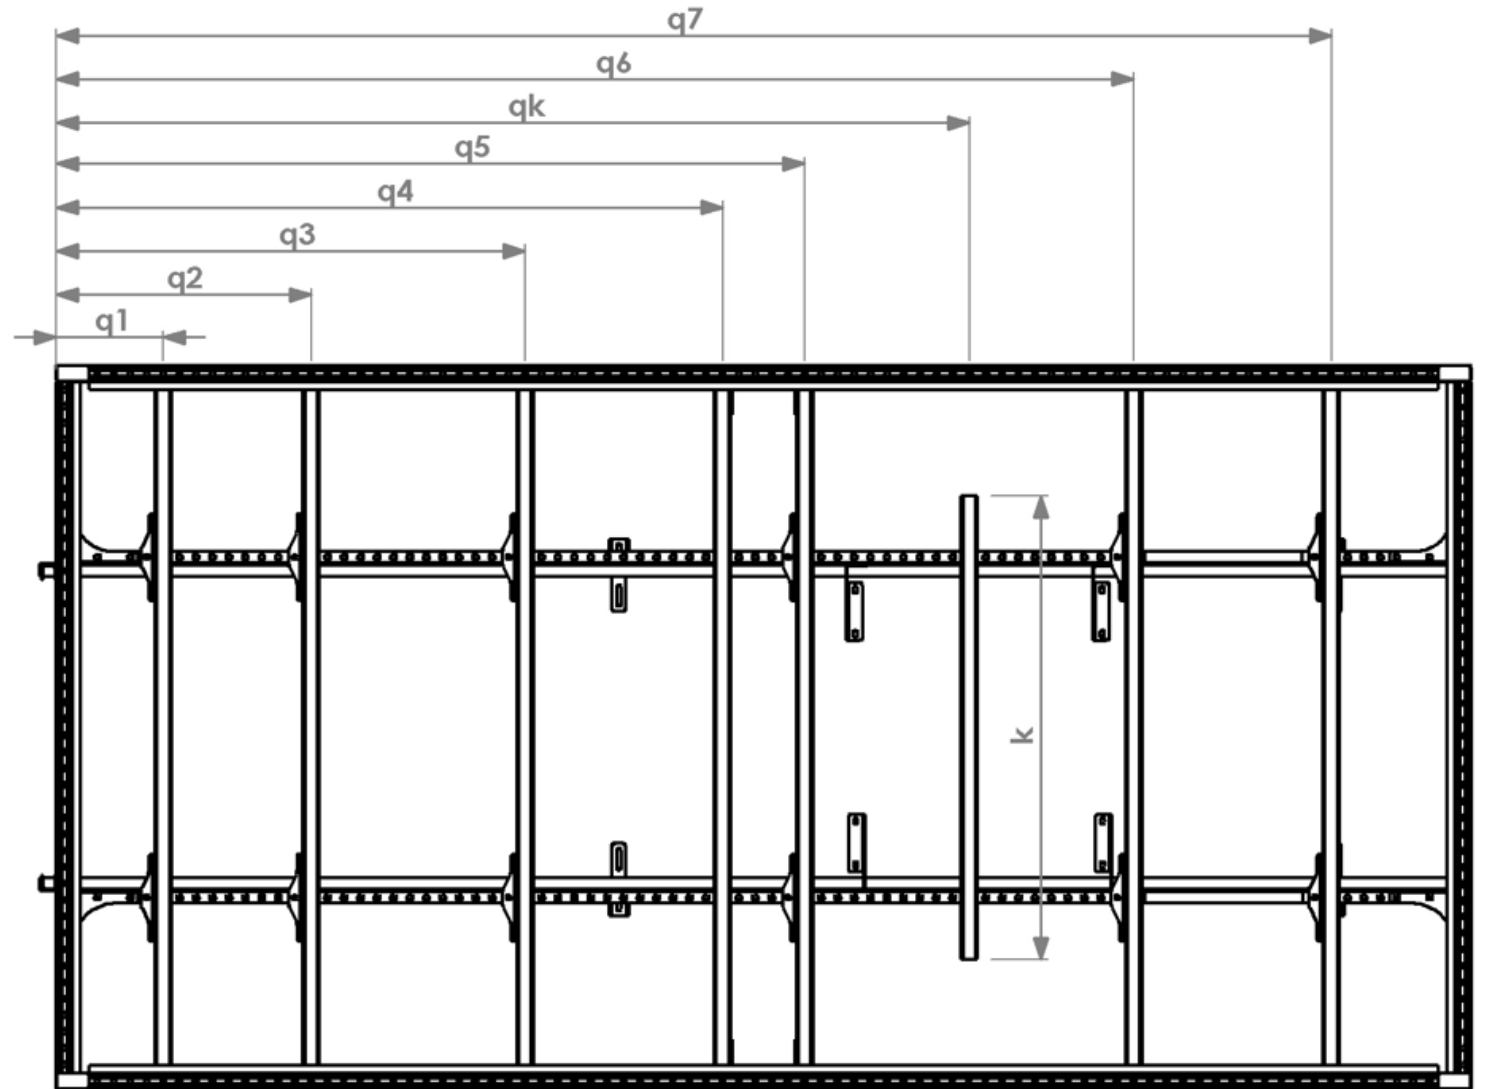


ORDERING PARAMETERS

Pp – Front overlap

Standard	0/50 mm
Iveco DAILY	100 mm

Individual request on demand.

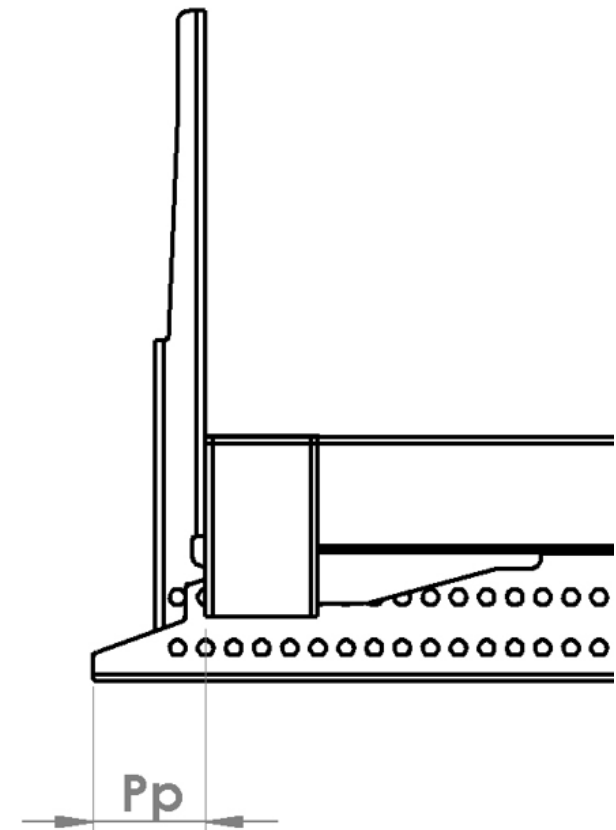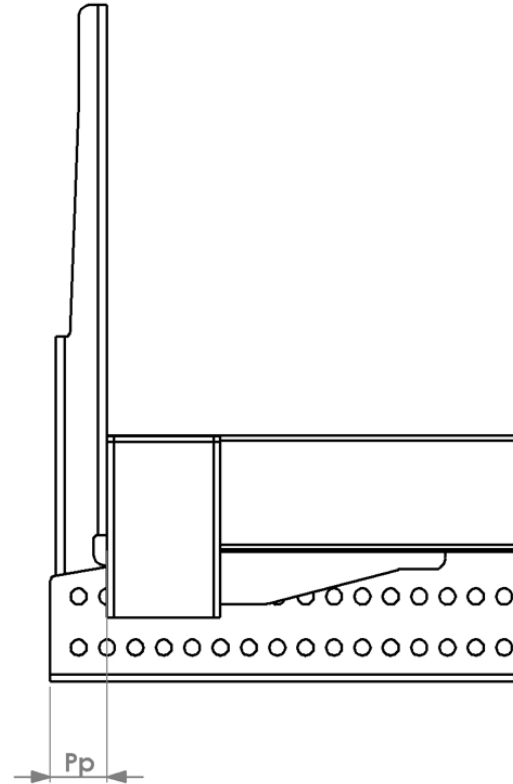


ORDERING PARAMETERS

Pz – Rear overhang

Standard 88/63 mm

Individual request on demand.

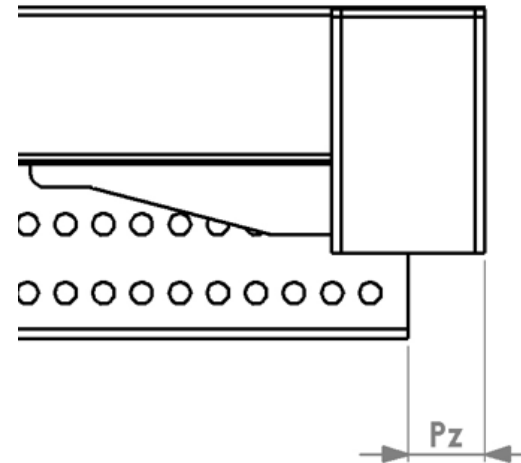

SCREWABLE STEEL SUBFRAMES SRV75 UP TO 7,5 TONS

CONTACT

CARGOFRAMES

www.cargoframes.eu

Ing. Zdeněk Lhoták
Tel: +420 721 669 712
Email: z.lhotak@cargoframes.eu

Ing. Aleš Hoferek
Tel: +420 604 428 110
Email: a.hoferek@cargoframes.eu

CARGO FRAMES s.r.o., Komerční 524, Nupaky – Praha Východ - 251 01, Czech Republic